



DB

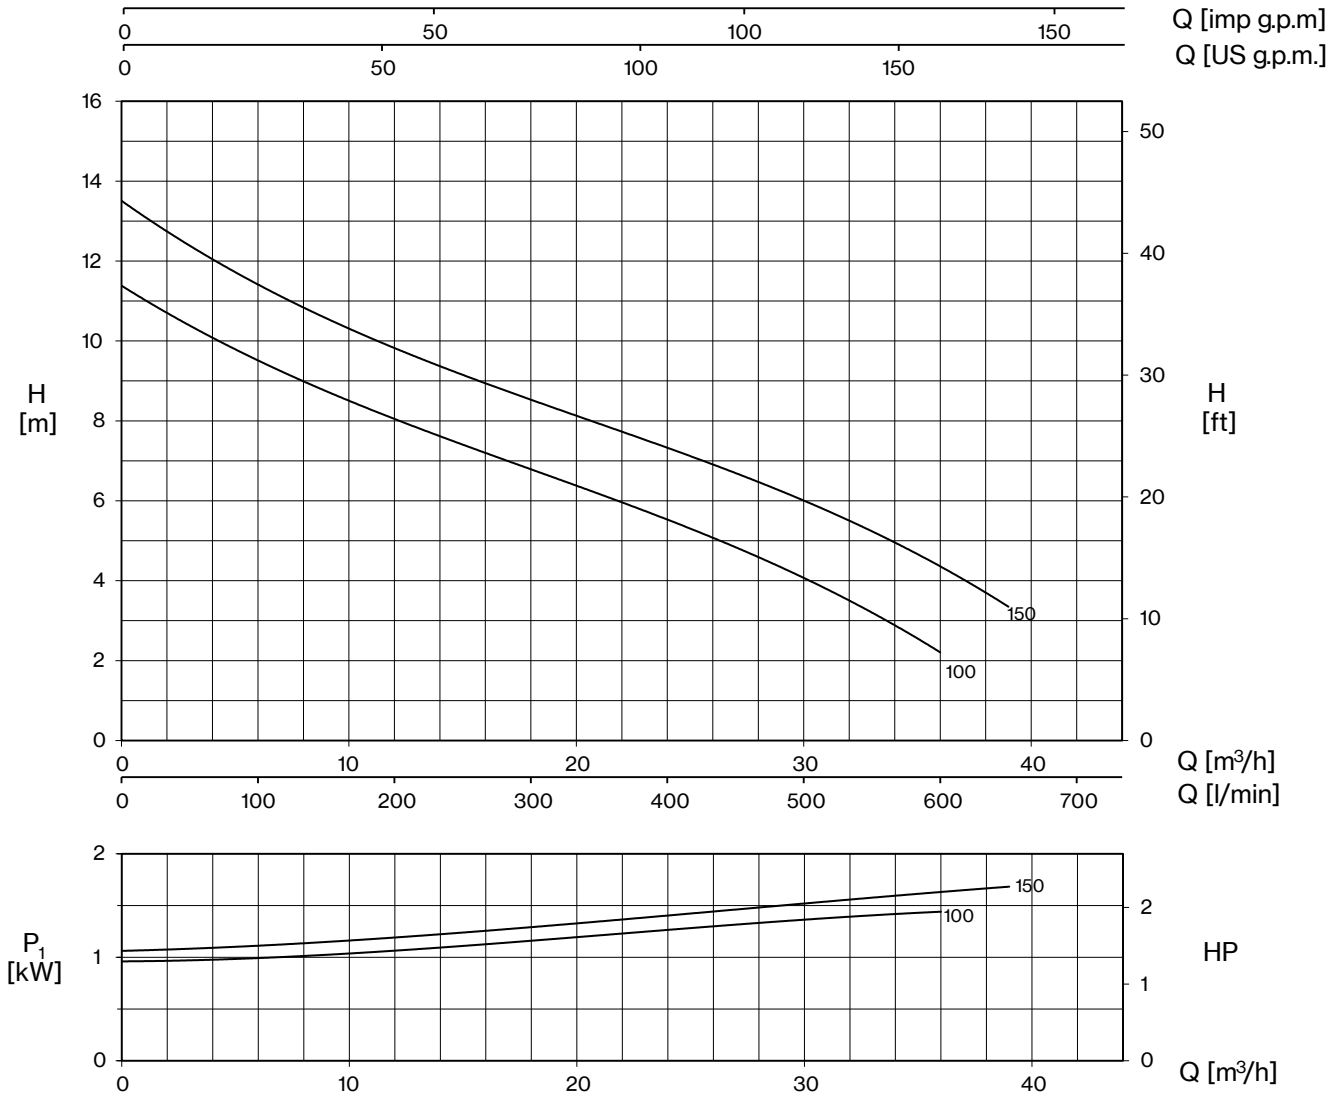

TYPE - 50 Hz		P1	CURRENT		Q (m³/h - l/min)							
1~	3~		1~ 230V	3~ 400V	0	6	12	18	24	30	36	39
					0	100	200	300	400	500	600	650
			kW	A		H (m)						
DB 100 (G)	DBT 100	1,35	5,9	2,8	11,4	9,5	8,0	6,8	5,6	4,0	2,2	
DB 150 (G)	DBT 150	1,7	8,0	3,0	13,6	11,5	9,8	8,5	7,3	6,0	4,3	3,4

E: maximum emptying level
Mt: minimum liquid level for continuous duty

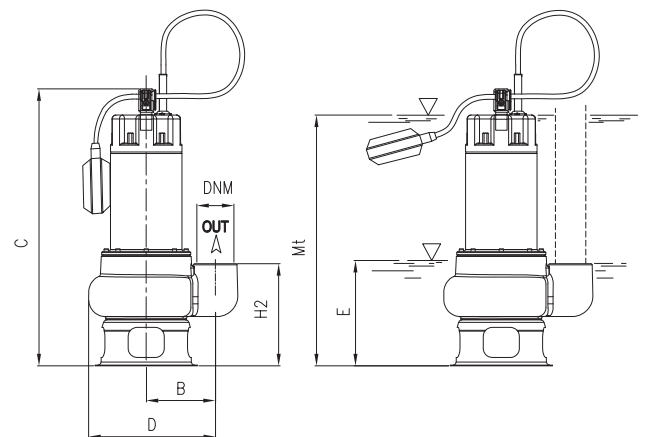

TYPE		DIMENSIONS (mm)							M			Kg
1~	3~	B	C	D	E	H2	Mt	DNM	I	L	M	
DB 100 (G)	DBT 100	115	469	210	160	170	417	2" G	200	260	470	17
DB 150 (G)	DBT 150	115	469	210	160	170	417		200	260	470	18,5

