
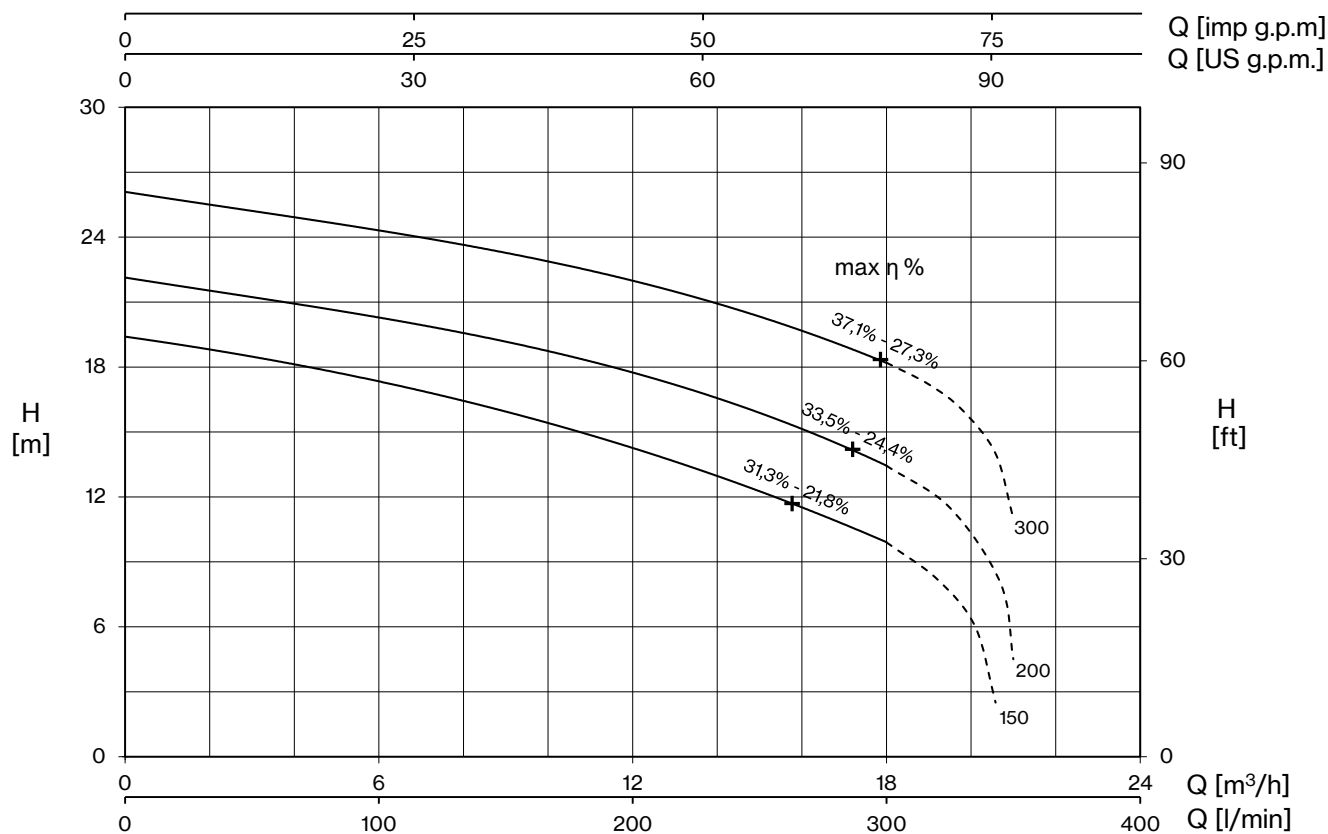


DTR/DTRT

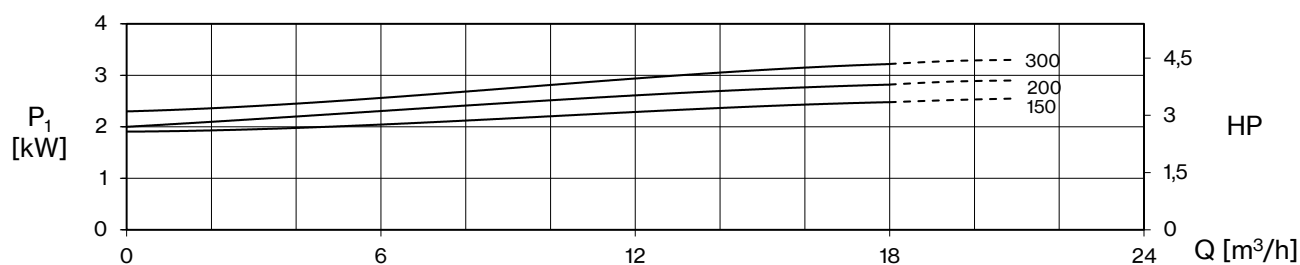

TYPE - 50 Hz		CURRENT				
1~	3~	230 V	3~ 230V (*)	3~ 400V	230/400 V λ / Δ (*)	400/690 V λ / Δ
DTR 150	DTRT 150	11,5	7,6	4,4	-	-
DTR 200	DTRT 200	13,6	8,8	5,1	-	-
-	DTRT 300	-	10,0	5,8	-	-

+ max η %


max hydraulic efficiency and respective total efficiency

(*) no standard execution

TYPE - 50 Hz		P2		P1		Q (m³/h - l/min)							
1~	3~			1~	3~	0	3	6	9	12	13,2	15	18
						0	50	100	150	200	220	250	300
				HP	kW	kW		H (m)					
DTR 150	DTRT 150	1,5	1,1	2,6	2,5	19,4	18,5	17,3	16,0	14,2	13,5	12,3	9,9
DTR 200	DTRT 200	2	1,5	3	2,8	22,1	21,3	20,3	19,1	17,7	17,1	16	13,4
-	DTRT 300	3	2,2	-	3,2	26,1	25,2	24,3	23,3	22	21,4	20,3	18,2



DTR/DTRT

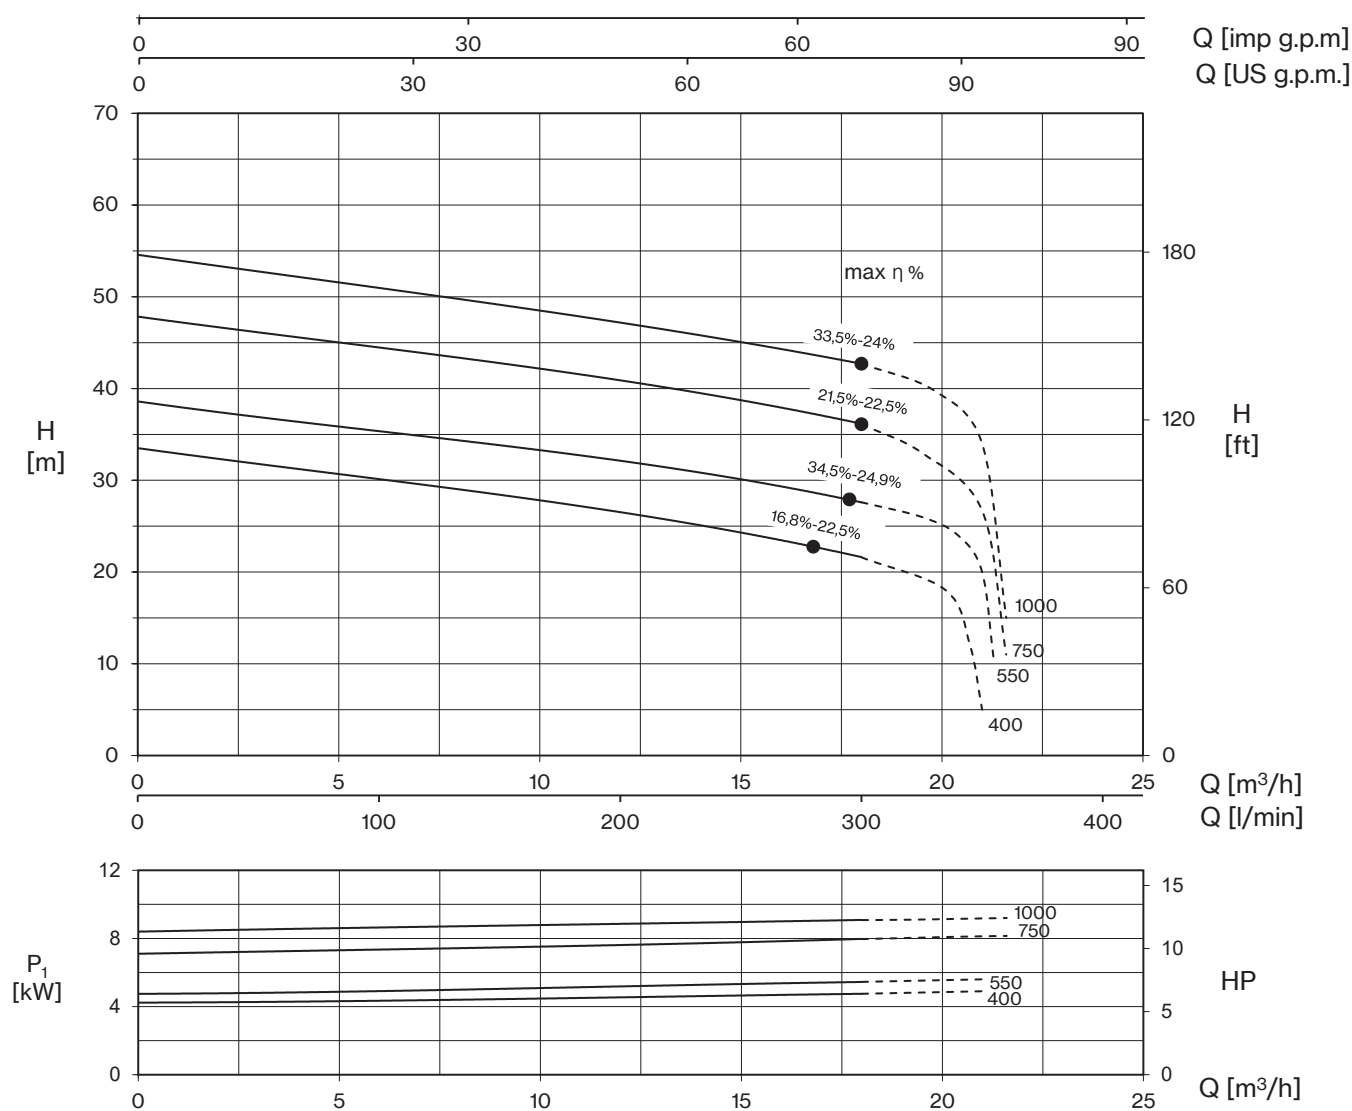

TYPE - 50 Hz	CURRENT			
3~	3~ 230V (*)	3~ 400V	230/400V λ / Δ (*)	400/690V λ / Δ
DTRT 400	13,0	7,5	-	-
DTRT 550	15,9	9,2	-	-
DTRT 750	-	13,9	24	13,9
DTRT 1000	-	15,5	26,8	15,5

(*) no standard execution

+ max η %

max hydraulic efficiency and respective total efficiency

TYPE - 50 Hz	P2		P1	Q (m³/h - l/min)							
				0	3	6	9	12	15	18	
	HP	kW	kW	0	50	100	150	200	250	300	
DTRT 400	4	3	4,5	33,5	31,8	30,1	28,5	26,4	24,4	21,6	
DTRT 550	5,5	4	5,3	38,6	36,9	35,3	33,9	32,1	30,1	27,6	
DTRT 750	7,5	5,5	8,0	47,8	46,2	44,5	42,7	40,8	38,9	36,1	
DTRT 1000	10	7,5	9,1	54,6	52,7	51,0	49,2	47,1	45,1	42,7	

