


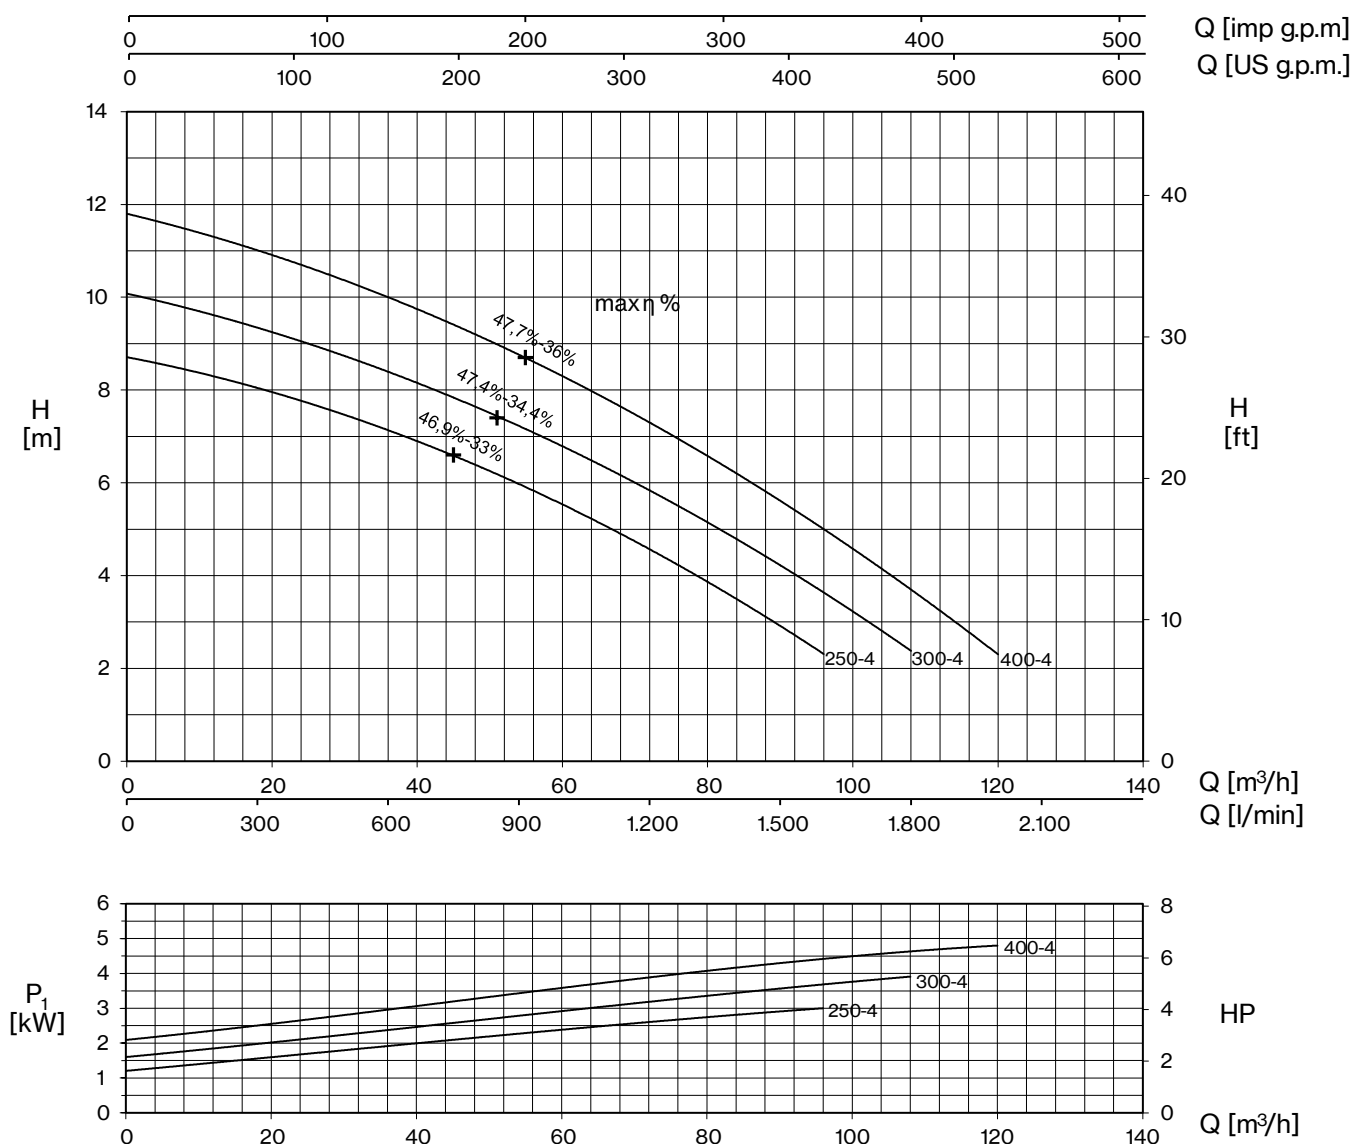

TYPE - 50 Hz	CURRENT			
3~	3~ 230V (*)	3~ 400V	230/400 V Δ / Δ (*)	400/690 V Δ / Δ
DVT 250-4	10	5,8	-	-
DVT 300-4	11,8	6,8	-	-
DVT 400-4	15,1	8,7	-	-

+ max η %


max hydraulic efficiency and respective total efficiency

(*) no standard execution

TYPE - 50 Hz		Q (m³/h - l/min)												
3~	P2		P1	0	12	24	36	48	60	72	84	96	108	120
				0	200	400	600	800	1000	1200	1400	1600	1800	2000
	HP	kW	kW	H (m)										
DVT 250-4	2,5	1,8	3,3	8,7	8,3	7,8	7,1	6,4	5,5	4,6	3,5	2,3		
DVT 300-4	3	2,2	4,1	10,1	9,6	9,0	8,4	7,7	6,8	5,8	4,8	3,6	2,4	
DVT 400-4	4	3	4,9	11,8	11,3	10,7	10,0	9,2	8,3	7,3	6,2	5,0	3,7	2,3



DV4

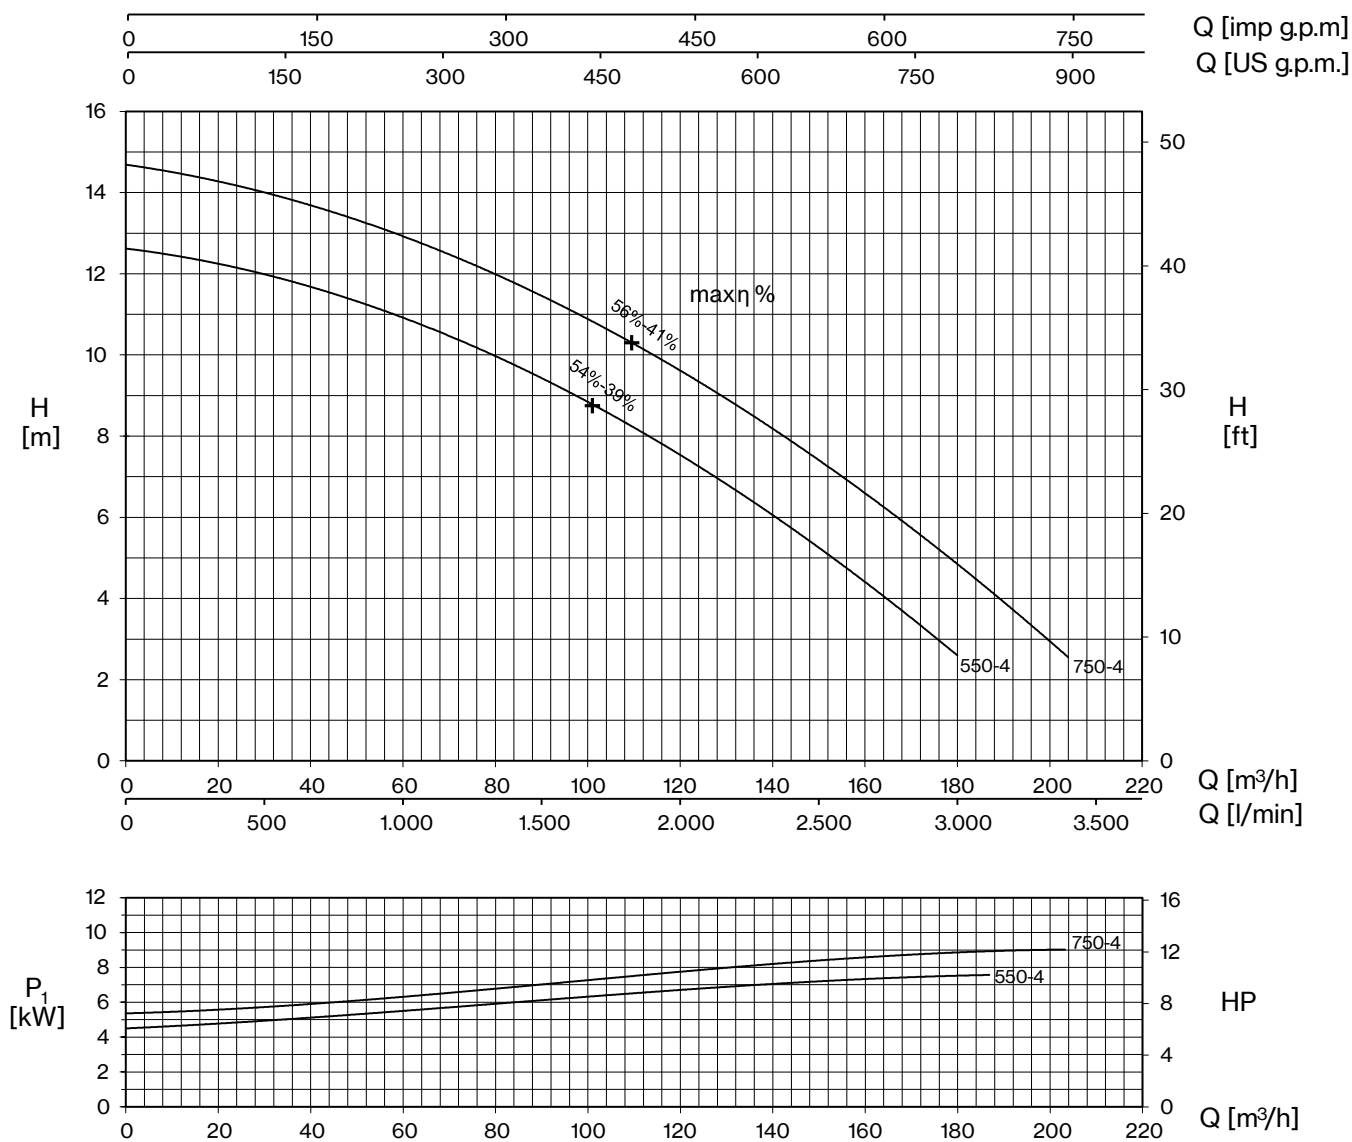

TYPE - 50 Hz	CURRENT			
3~	3~ 230V (*)	3~ 400V	230/400 V Δ / Δ (*)	400/690 V Δ / Δ
DVT 550-4	-	12,9	22,3	12,9
DVT 750-4	-	15,4	26,6	15,4

+ max η %

max hydraulic efficiency and respective total efficiency

(*) no standard execution

TYPE - 50 Hz 3~	P2		P1	Q (m³/h - l/min)										
				0	24	48	72	96	120	144	168	180	192	204
			0	400	800	1200	1600	2000	2400	2800	3000	3200	3400	
	HP	kW	kW	H (m)										
DVT 550-4	5,5	4	7,5	12,6	12,2	11,4	10,3	9,1	7,6	5,7	3,7	2,6		
DVT 750-4	7,5	5,5	9	14,7	14,2	13,3	12,4	11,2	9,6	7,9	5,9	4,8	3,7	2,6

