




50 Hz - 2900 rpm				Q								
TYPE	SUITABLE MOTOR 3~ 400V		I/min	0	100	150	200	250	300	350	400	
	P2		CURRENT	I/sec	0,0	1,7	2,5	3,3	4,2	5,0	5,8	6,7
	HP	kW	A	m³/h	0	6	9	12	15	18	21	24
6LRH 14/01	1	0,75	2,6	H (m)	15	14	13	13	12	11	9	7
6LRH 14/02	2	1,5	4,6		29	28	26	25	23	21	18	14
6LRH 14/03	3	2,2	6,4		44	41	40	38	35	32	26	20
6LRH 14/04	4	3	8,3		58	55	53	50	46	42	35	27
6LRH 14/05	5,5	4	9,6		73	69	66	63	58	53	44	34
6LRH 14/06	7,5	5,5	13,6		88	83	79	75	70	63	53	41
6LRH 14/07	7,5	5,5	13,6		102	97	92	88	81	74	62	48
6LRH 14/08	7,5	5,5	13,6		117	110	106	100	93	84	70	54
6LRH 14/09	10	7,5	16,3		131	124	119	113	104	95	79	61
6LRH 14/10	10	7,5	16,3		146	138	132	125	116	105	88	68
6LRH 14/11	12,5	9,2	19,9		161	152	145	138	128	116	97	75
6LRH 14/12	12,5	9,2	19,9		175	166	158	150	139	126	106	82
6LRH 14/13	12,5	9,2	19,9		190	179	172	163	151	137	114	88
6LRH 14/14	15	11	23,4		204	193	185	175	162	147	123	95
6LRH 14/15	15	11	23,4		219	207	198	188	174	158	132	102
6LRH 14/16	15	11	23,4		234	221	211	200	186	168	141	109
6LRH 14/17	17,5	13	27,3		248	235	224	213	197	179	150	116
6LRH 14/18	17,5	13	27,3		263	248	238	225	209	189	158	122

Max Eff. %	74
Max kW / St.	0,71

NPSH (m)	Q=25%	Q=50%	Q=75%	Q=100%
	3	3	4	6

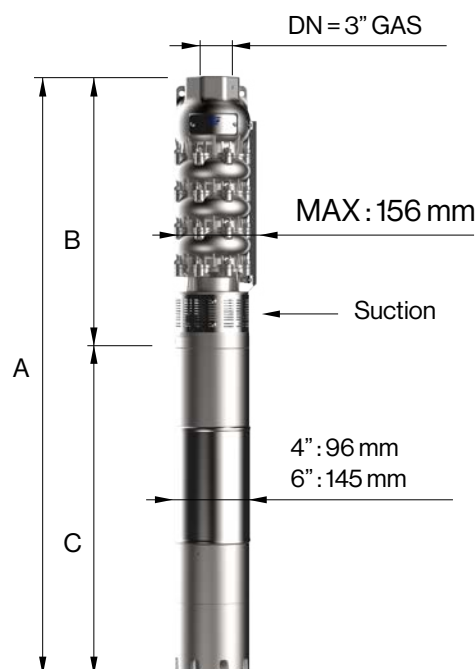


TYPE 3~	MOTOR BRACKET	DIMENSIONS (mm)			WEIGHT (kg)	
		A	B	C	MOTOR	PUMP
6LRH 14/01-4	4" NEMA	627	302	325	7,6	11
6LRH 14/02-4		754	369	385	10,4	15
6LRH 14/03-4		856	436	420	12	20
6LRH 14/04-4		921	503	418	12,8	24
6LRH 14/05-4		1038	570	468	15,3	28
6LRH 14/06-4		1175	637	538	18,6	32
6LRH 14/07-4		1242	704	538	18,6	36
6LRH 14/08-4		1309	771	538	18,6	40
6LRH 14/09	6" NEMA	1539	838	701	55	44
6LRH 14/10		1606	905	701	55	49
6LRH 14/11		1723	972	751	60	53
6LRH 14/12		1790	1039	751	60	57
6LRH 14/13		1857	1106	751	60	61
6LRH 14/14		1984	1173	811	65	65
6LRH 14/15		2051	1240	811	65	69
6LRH 14/16		2118	1307	811	65	74
6LRH 14/17		2215	1374	841	70	78
6LRH 14/18		2282	1441	841	70	82

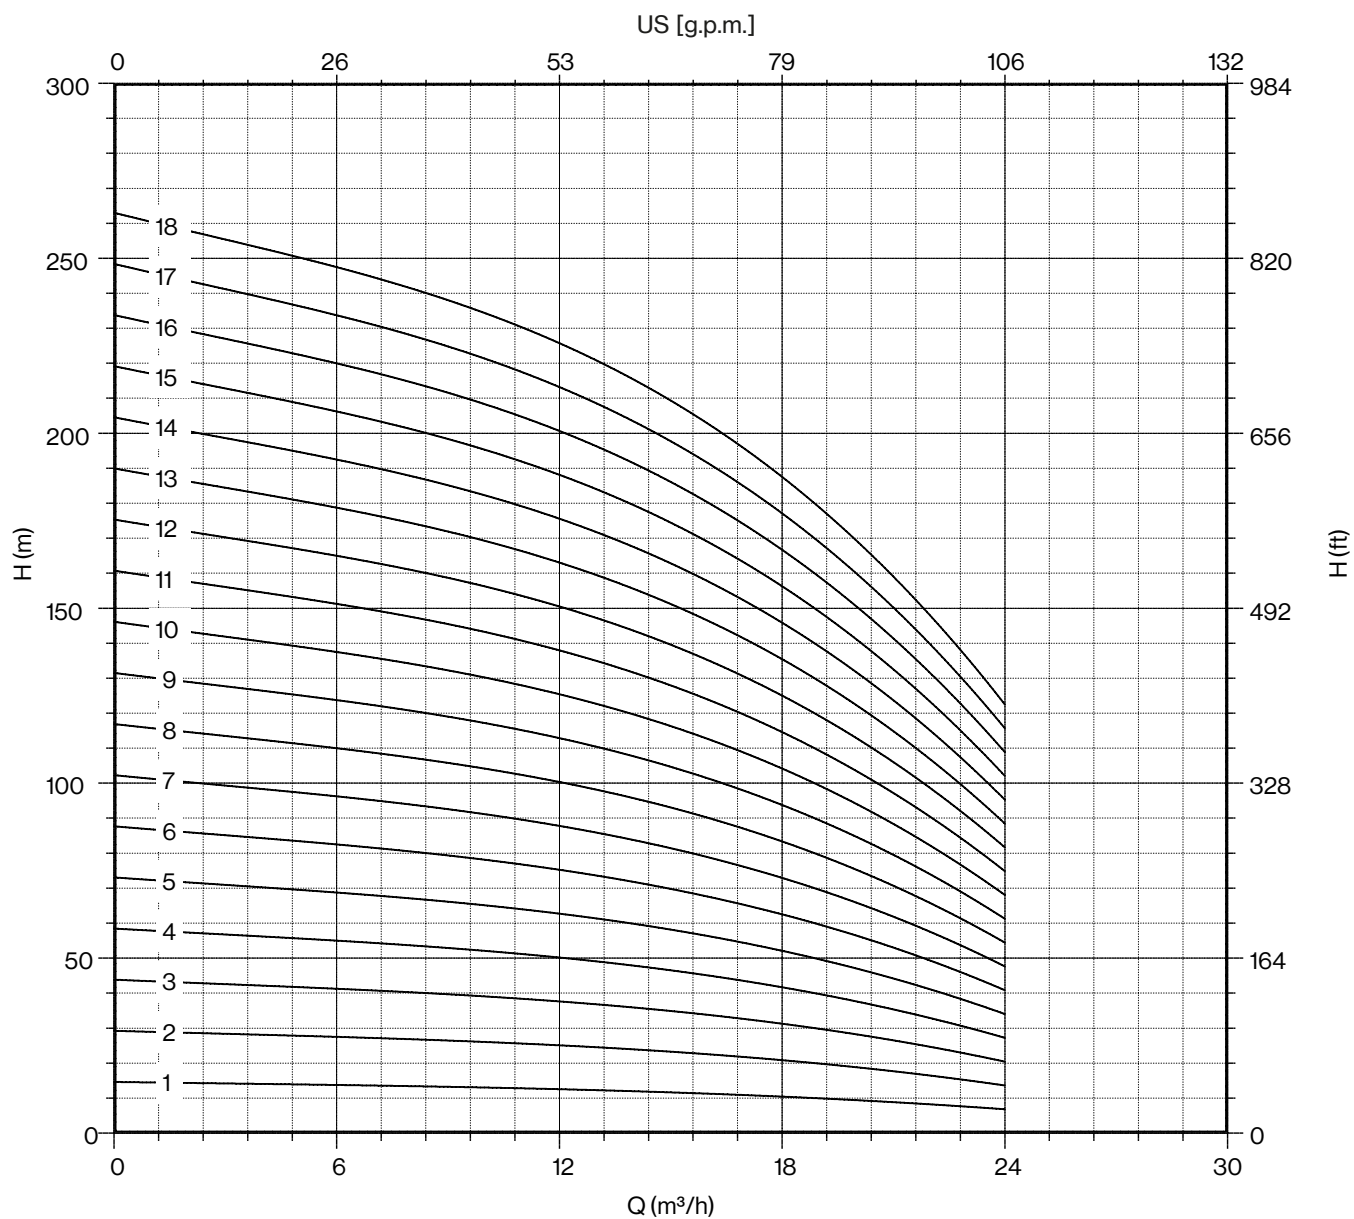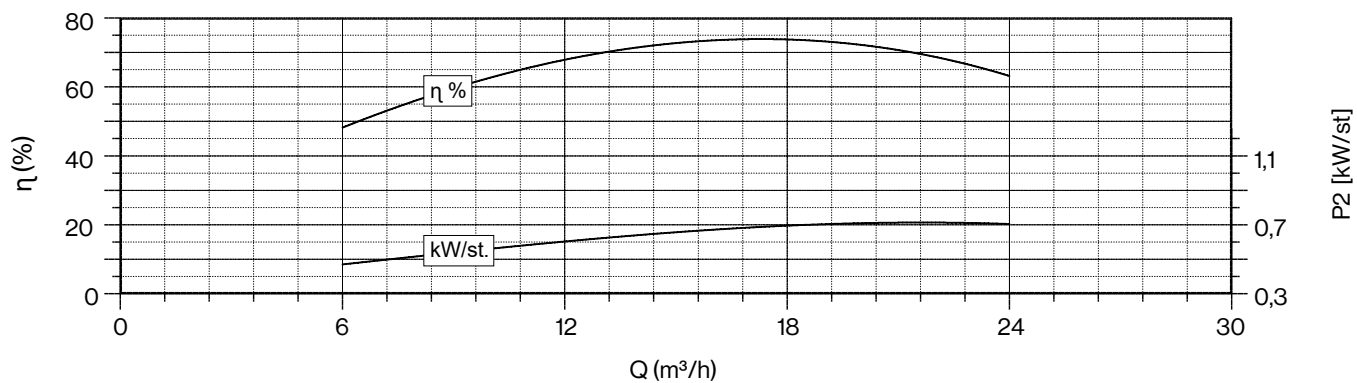



50 Hz - 2900 rpm				Q								
TYPE	SUITABLE MOTOR 3~ 400V		I/min	0	100	150	200	250	300	350	400	
	P2		CURRENT	I/sec	0,0	1,7	2,5	3,3	4,2	5,0	5,8	6,7
	HP	kW	A	m³/h	0	6	9	12	15	18	21	24
6LRH 14/19	20	15	31,5	H (m)	277	262	251	238	220	200	167	129
6LRH 14/20	20	15	31,5		292	276	264	250	232	210	176	136
6LRH 14/21	20	15	31,5		307	290	277	263	244	221	185	143
6LRH 14/22	25	18,5	38,3		321	304	290	275	255	231	194	150
6LRH 14/23	25	18,5	38,3		336	317	304	288	267	242	202	156
6LRH 14/24	25	18,5	38,3		350	331	317	300	278	252	211	163
6LRH 14/25	25	18,5	38,3		365	345	330	313	290	263	220	170
6LRH 14/26	25	18,5	38,3		380	359	343	325	302	273	229	177
6LRH 14/27	30	22	45,1		394	373	356	338	313	284	238	184
6LRH 14/28	30	22	45,1		409	386	370	350	325	294	246	190
6LRH 14/29	30	22	45,1		423	400	383	363	336	305	255	197
6LRH 14/30	30	22	45,1		438	414	396	375	348	315	264	204
6LRH 14/31	30	22	45,1		453	428	409	388	360	326	273	211
6LRH 14/32	35	26	52,9		467	442	422	400	371	336	282	218
6LRH 14/33	35	26	52,9		482	455	436	413	383	347	290	224
6LRH 14/34	35	26	52,9		496	469	449	425	394	357	299	231
6LRH 14/35	35	26	52,9		511	483	462	438	406	368	308	238
6LRH 14/36	35	26	52,9	526	497	475	450	418	378	317	245	
6LRH 14/37	35	26	52,9	540	511	488	463	429	389	326	252	

Max Eff. %	74
Max kW / St.	0,71

NPSH (m)	Q=25%	Q=50%	Q=75%	Q=100%
	3	3	4	6

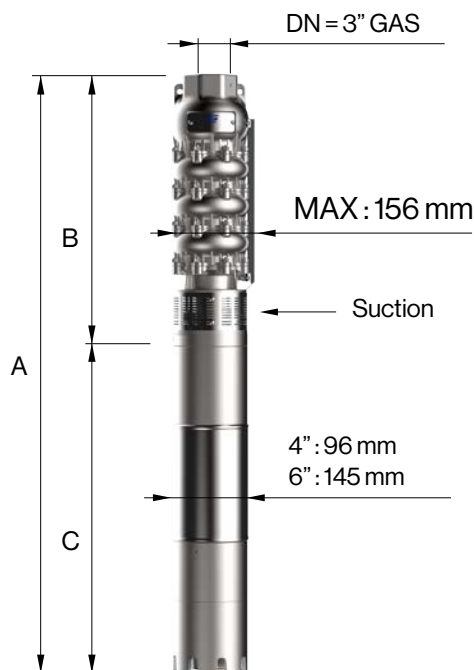


TYPE 3~	MOTOR BRACKET	DIMENSIONS (mm)			WEIGHT (kg)	
		A	B	C	MOTOR	PUMP
6LRH 14/19	6" NEMA	2439	1508	931	75	86
6LRH 14/20		2506	1575	931	75	90
6LRH 14/21		2573	1642	931	75	94
6LRH 14/22		2700	1709	991	83	98
6LRH 14/23		2767	1776	991	83	103
6LRH 14/24		2834	1843	991	83	107
6LRH 14/25		2901	1910	991	83	111
6LRH 14/26		2968	1977	991	83	115
6LRH 14/27		3115	2044	1071	92	119
6LRH 14/28		3182	2111	1071	92	123
6LRH 14/29		3249	2178	1071	92	127
6LRH 14/30		3316	2245	1071	92	132
6LRH 14/31		3383	2312	1071	92	136
6LRH 14/32		3560	2379	1181	100	140
6LRH 14/33		3627	2446	1181	100	144
6LRH 14/34		3694	2513	1181	100	148
6LRH 14/35		3761	2580	1181	100	152
6LRH 14/36		3828	2647	1181	100	157
6LRH 14/37		3895	2714	1181	100	161

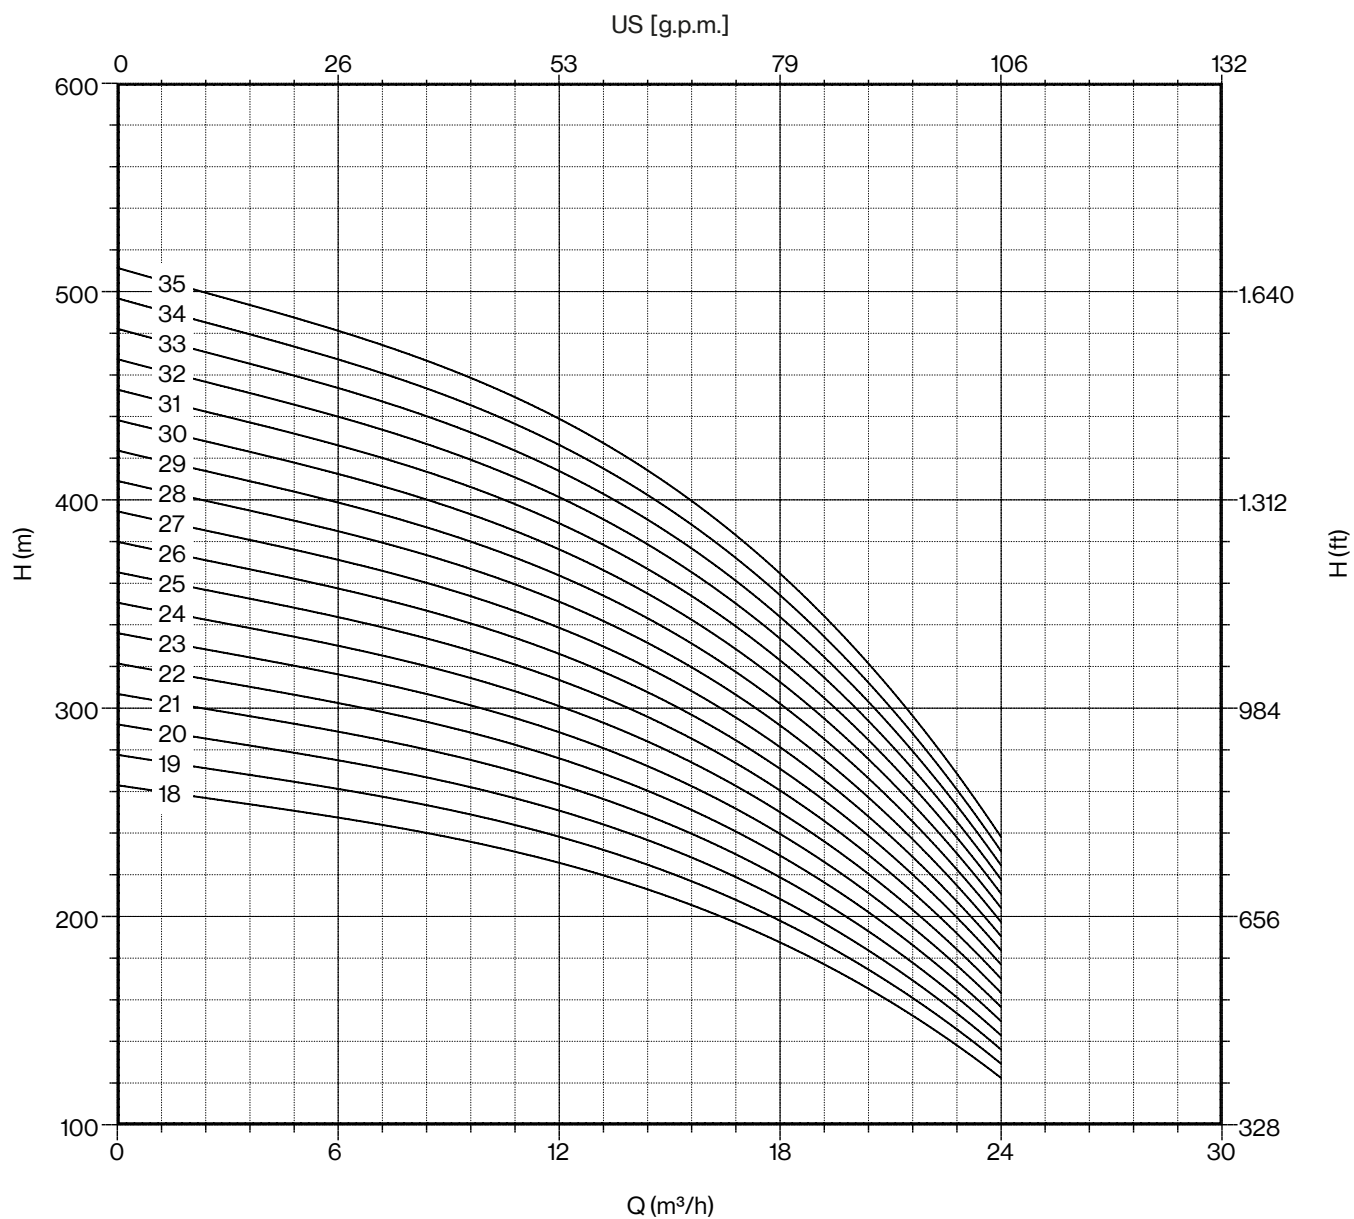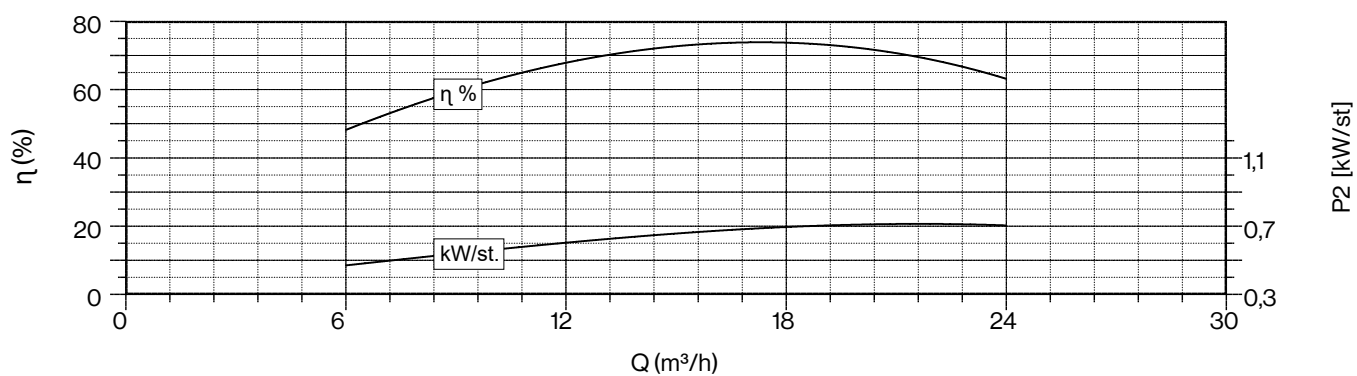



50 Hz - 2900 rpm				Q									
TYPE	SUITABLE MOTOR 3~ 400V		I/min	0	150	200	250	300	350	400	450	500	
	P2		CURRENT	I/sec	0,0	2,5	3,3	4,2	5,0	5,8	6,7	7,5	8,3
	HP	kW	A	m³/h	0	9	12	15	18	21	24	27	30
6LRH 20/01	1,5	1,1	3,4	H (m)	15	14	14	13	12	11	10	9	7
6LRH 20/02	3	2,2	6,4		29	28	27	26	25	23	20	17	14
6LRH 20/03	4	3	8,3		44	42	41	40	37	34	30	26	21
6LRH 20/04	5,5	4	9,6		58	56	54	53	50	45	40	35	28
6LRH 20/05	7,5	5,5	13,6		73	71	68	66	62	57	51	44	35
6LRH 20/06	7,5	5,5	13,6		87	85	82	79	74	68	61	52	42
6LRH 20/07	10	7,5	16,3		102	99	95	92	87	79	71	61	49
6LRH 20/08	10	7,5	16,3		116	113	109	106	99	90	81	70	56
6LRH 20/09	12,5	9,2	19,9		131	127	122	119	112	102	91	78	63
6LRH 20/10	12,5	9,2	19,9		145	141	136	132	124	113	101	87	70
6LRH 20/11	15	11	23,4		160	155	150	145	136	124	111	96	77
6LRH 20/12	15	11	23,4		174	169	163	158	149	136	121	104	84
6LRH 20/13	17,5	13	27,3		189	183	177	172	161	147	131	113	91
6LRH 20/14	17,5	13	27,3		203	197	190	185	174	158	141	122	98
6LRH 20/15	20	15	31,5		218	212	204	198	186	170	152	131	105
6LRH 20/16	20	15	31,5		232	226	218	211	198	181	162	139	112
6LRH 20/17	25	18,5	38,3		247	240	231	224	211	192	172	148	119
6LRH 20/18	25	18,5	38,3		261	254	245	238	223	203	182	157	126

Max Eff. %	76
Max kW / St.	0,93

NPSH (m)	Q=25%	Q=50%	Q=75%	Q=100%
	3	3	4	6

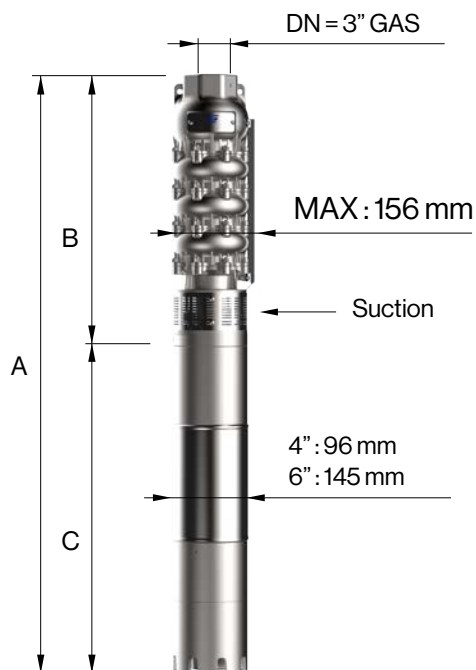


TYPE 3~	MOTOR BRACKET	DIMENSIONS (mm)			WEIGHT (kg)	
		A	B	C	MOTOR	PUMP
6LRH 20/01-4	4" NEMA	652	302	350	8,7	11
6LRH 20/02-4		789	369	420	12	15
6LRH 20/03-4		854	436	418	12,8	20
6LRH 20/04-4		971	503	468	15,3	24
6LRH 20/05-4		1108	570	538	18,6	28
6LRH 20/06-4		1175	637	538	18,6	32
6LRH 20/07	6" NEMA	1405	704	701	55	36
6LRH 20/08		1472	771	701	55	40
6LRH 20/09		1589	838	751	60	44
6LRH 20/10		1656	905	751	60	49
6LRH 20/11		1783	972	811	65	53
6LRH 20/12		1850	1039	811	65	57
6LRH 20/13		1947	1106	841	70	61
6LRH 20/14		2014	1173	841	70	65
6LRH 20/15		2171	1240	931	75	69
6LRH 20/16		2238	1307	931	75	74
6LRH 20/17		2365	1374	991	83	78
6LRH 20/18		2432	1441	991	83	82

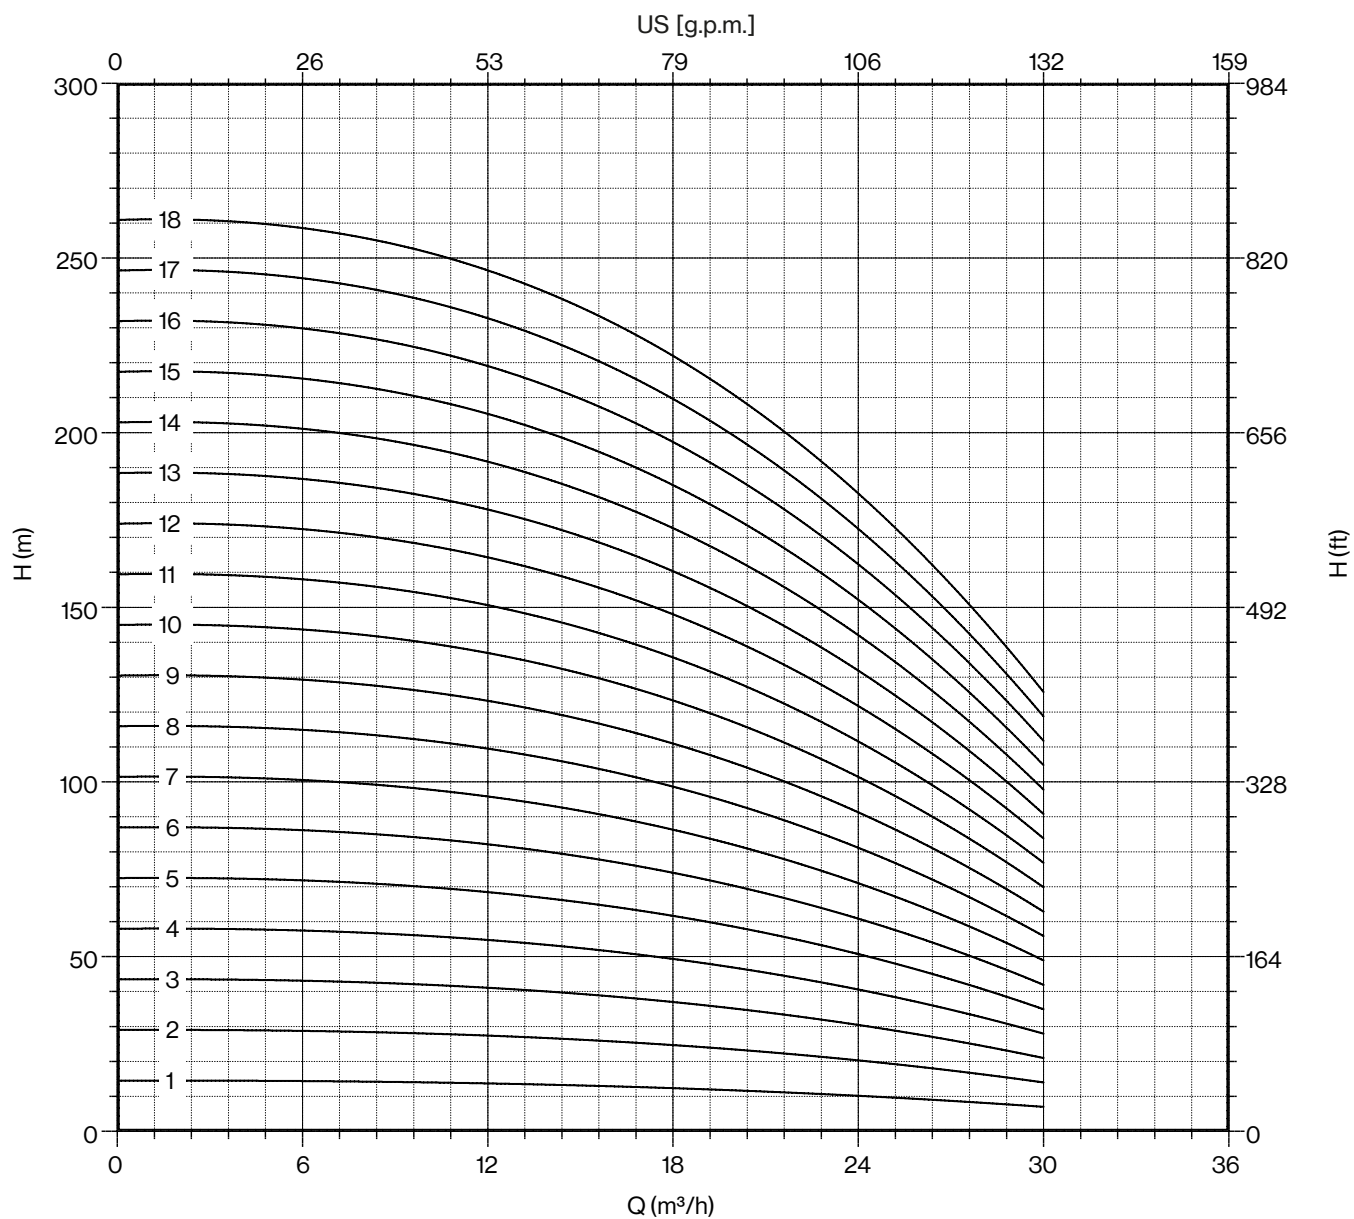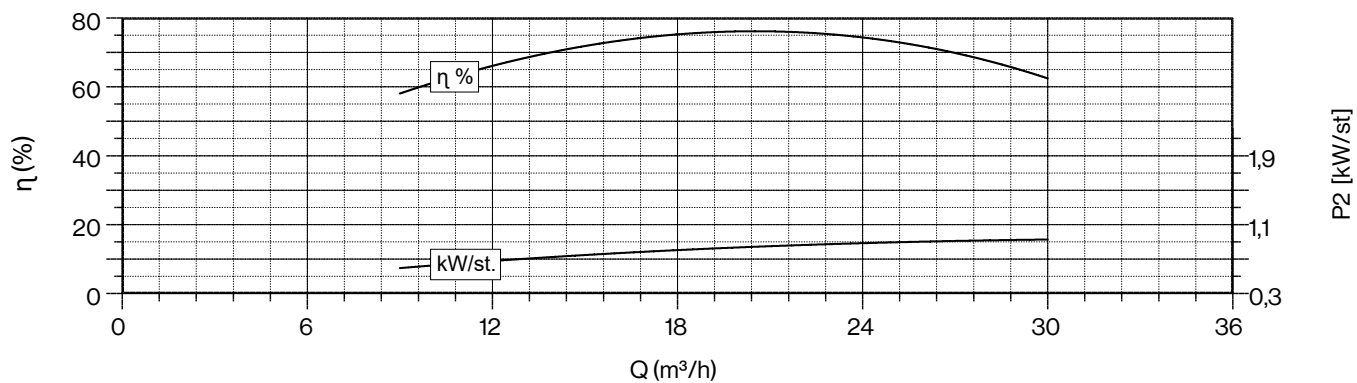


50 Hz - 2900 rpm				Q									
TYPE	SUITABLE MOTOR 3~ 400V		I/min	0	150	200	250	300	350	400	450	500	
	P2		CURRENT	I/sec	0,0	2,5	3,3	4,2	5,0	5,8	6,7	7,5	8,3
	HP	kW	A	m³/h	0	9	12	15	18	21	24	27	30
6LRH 20/19	25	18,5	38,3	H (m)	276	268	258	251	236	215	192	165	133
6LRH 20/20	25	18,5	38,3		290	282	272	264	248	226	202	174	140
6LRH 20/21	30	22	45,1		305	296	286	277	260	237	212	183	147
6LRH 20/22	30	22	45,1		319	310	299	290	273	249	222	191	154
6LRH 20/23	30	22	45,1		334	324	313	304	285	260	232	200	161
6LRH 20/24	30	22	45,1		348	338	326	317	298	271	242	209	168
6LRH 20/25	35	26	52,9		363	353	340	330	310	283	253	218	175
6LRH 20/26	35	26	52,9		377	367	354	343	322	294	263	226	182
6LRH 20/27	35	26	52,9		392	381	367	356	335	305	273	235	189
6LRH 20/28	35	26	52,9		406	395	381	370	347	316	283	244	196
6LRH 20/29	40	30	61,1		421	409	394	383	360	328	293	252	203
6LRH 20/30	40	30	61,1		435	423	408	396	372	339	303	261	210
6LRH 20/31	40	30	61,1		450	437	422	409	384	350	313	270	217
6LRH 20/32	40	30	61,1		464	451	435	422	397	362	323	278	224
6LRH 20/33	50	37	75,8		479	465	449	436	409	373	333	287	231
6LRH 20/34	50	37	75,8		493	479	462	449	422	384	343	296	238
6LRH 20/35	50	37	75,8	508	494	476	462	434	396	354	305	245	

Max Eff. %	76
Max kW / St.	0,93

NPSH (m)	Q=25%	Q=50%	Q=75%	Q=100%
	3	3	4	6

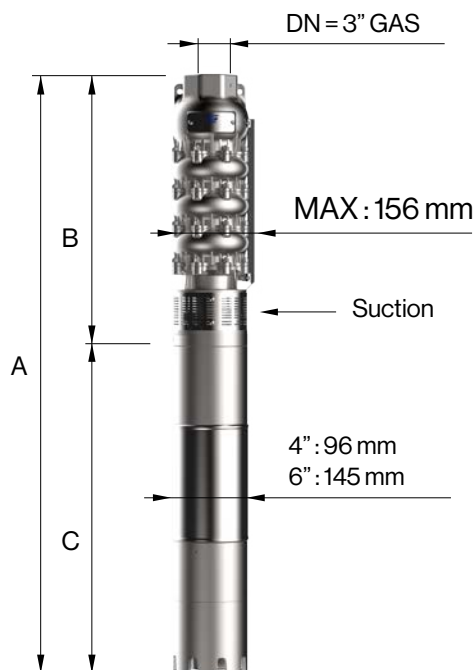


TYPE 3~	MOTOR BRACKET	DIMENSIONS (mm)			WEIGHT (kg)	
		A	B	C	MOTOR	PUMP
6LRH 20/19	6" NEMA	2499	1508	991	83	86
6LRH 20/20		2566	1575	991	83	90
6LRH 20/21		2713	1642	1071	92	94
6LRH 20/22		2780	1709	1071	92	98
6LRH 20/23		2847	1776	1071	92	103
6LRH 20/24		2914	1843	1071	92	107
6LRH 20/25		3091	1910	1181	100	111
6LRH 20/26		3158	1977	1181	100	115
6LRH 20/27		3225	2044	1181	100	119
6LRH 20/28		3292	2111	1181	100	123
6LRH 20/29		3429	2178	1251	108	127
6LRH 20/30		3496	2245	1251	108	132
6LRH 20/31		3563	2312	1251	108	136
6LRH 20/32		3630	2379	1251	108	140
6LRH 20/33		3787	2446	1341	118	144
6LRH 20/34		3854	2513	1341	118	148
6LRH 20/35		3921	2580	1341	118	152

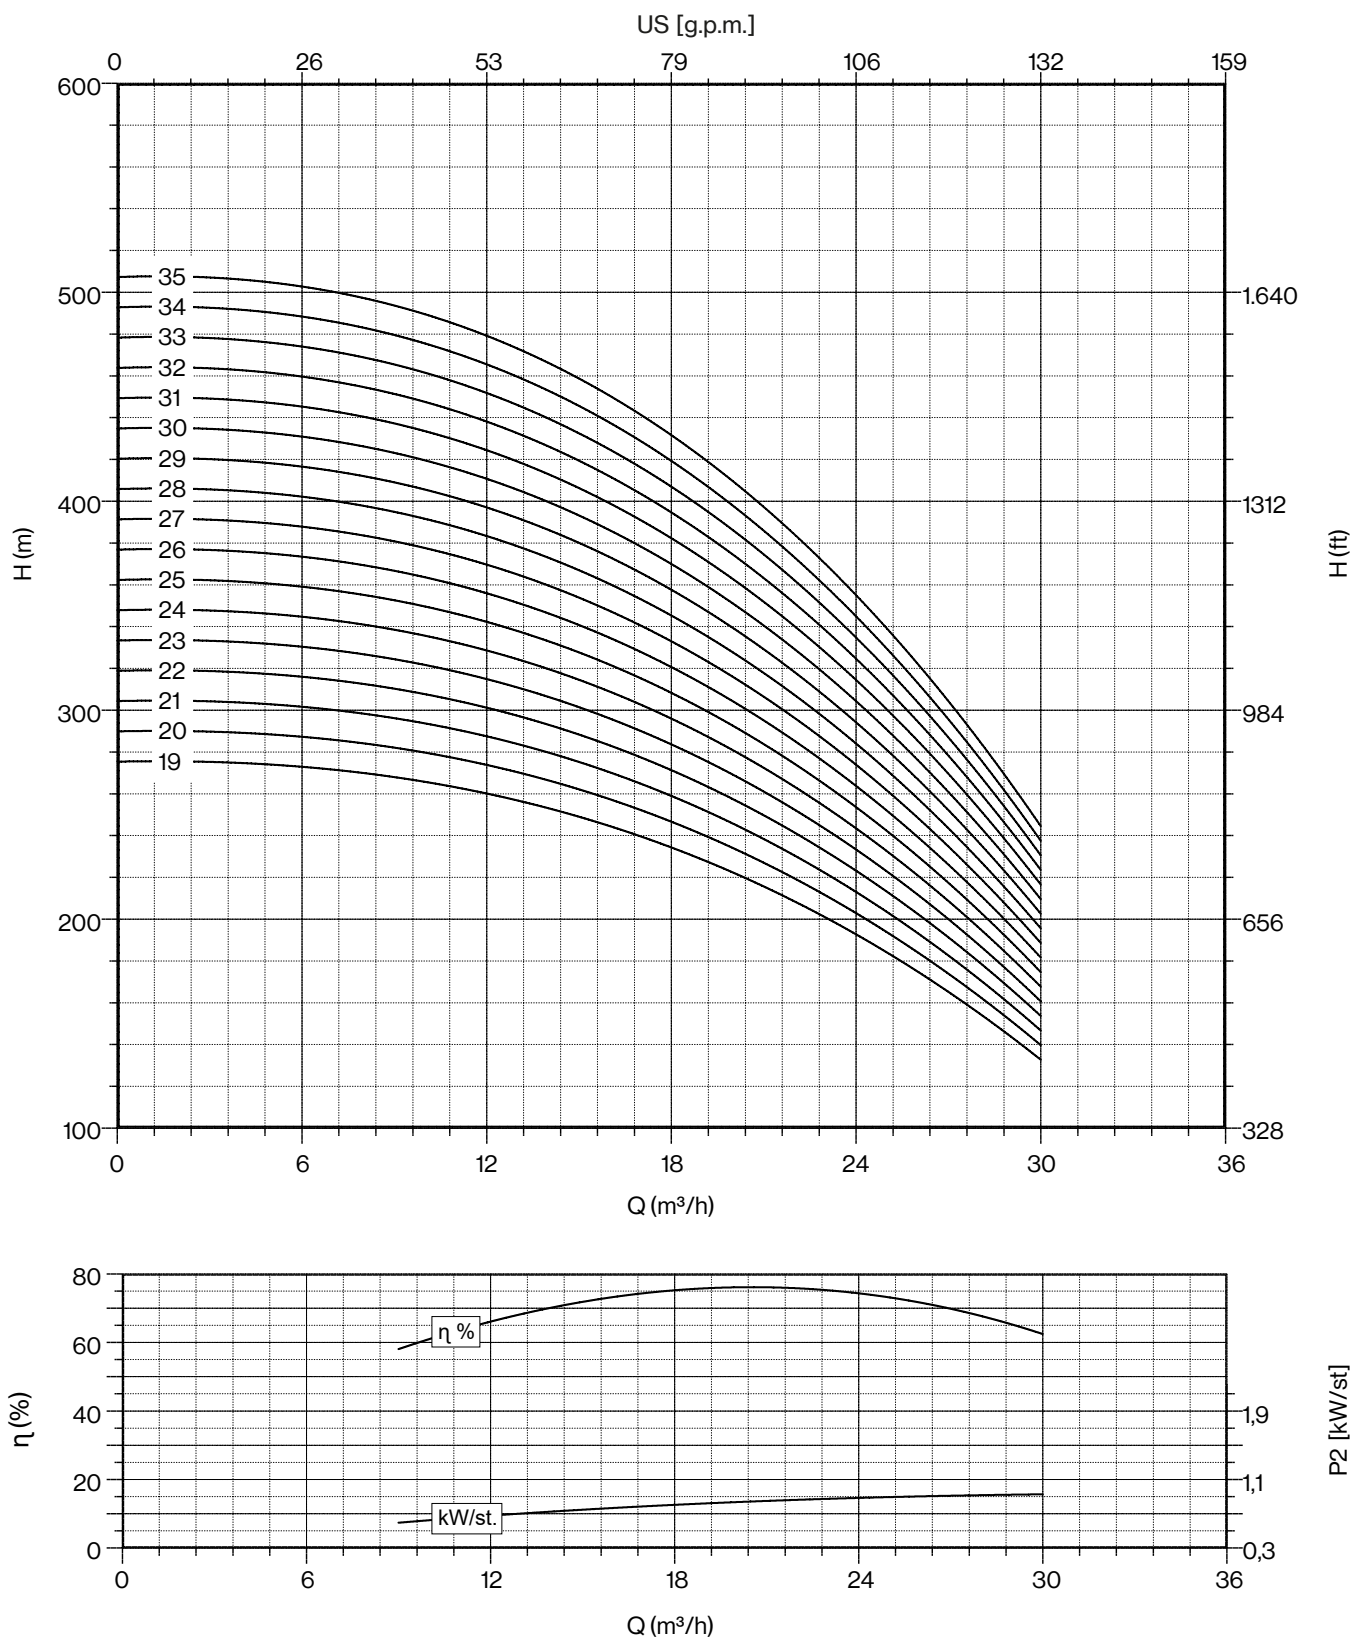



50 Hz - 2900 rpm				Q										
TYPE	SUITABLE MOTOR 3~ 400V		I/min	0	200	250	300	350	400	450	500	550	600	
	P2		CURRENT	I/sec	0,0	3,3	4,2	5,0	5,8	6,7	7,5	8,3	9,2	10,0
	HP	kW	A	m³/h	0	12	15	18	21	24	27	30	33	36
6LRH 25/01	1,5	1,1	3,4	H (m)	15	15	14	14	13	12	11	10	9	8
6LRH 25/02	3	2,2	6,4		30	29	28	27	26	24	23	21	18	16
6LRH 25/03	5,5	4	9,6		44	44	42	41	39	37	34	31	28	24
6LRH 25/04	7,5	5,5	13,6		59	58	56	54	52	49	45	41	37	32
6LRH 25/05	10	7,5	16,3		74	73	71	68	65	61	57	52	46	41
6LRH 25/06	10	7,5	16,3		89	87	85	82	78	73	68	62	55	49
6LRH 25/07	12,5	9,2	19,9		104	102	99	95	91	85	79	72	64	57
6LRH 25/08	12,5	9,2	19,9		118	116	113	109	104	98	90	82	74	65
6LRH 25/09	15	11	23,4		133	131	127	122	117	110	102	93	83	73
6LRH 25/10	17,5	13	27,3		148	145	141	136	130	122	113	103	92	81
6LRH 25/11	17,5	13	27,3		163	160	155	150	143	134	124	113	101	89
6LRH 25/12	20	15	31,5		178	174	169	163	156	146	136	124	110	97
6LRH 25/13	20	15	31,5		192	189	183	177	169	159	147	134	120	105
6LRH 25/14	25	18,5	38,3		207	203	197	190	182	171	158	144	129	113
6LRH 25/15	25	18,5	38,3		222	218	212	204	195	183	170	155	138	122
6LRH 25/16	25	18,5	38,3		237	232	226	218	208	195	181	165	147	130

Max Eff. %	78,5
Max kW / St.	1,15

NPSH (m)	Q=25%	Q=50%	Q=75%	Q=100%
	3	3	4,5	6,6

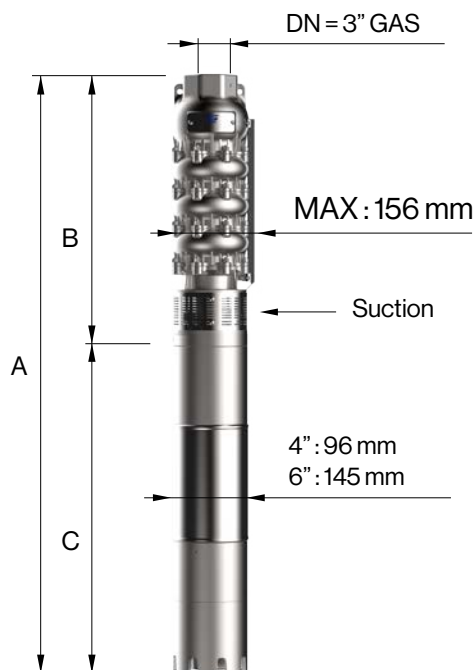


TYPE 3~	MOTOR BRACKET	DIMENSIONS (mm)			WEIGHT (kg)	
		A	B	C	MOTOR	PUMP
6LRH 25/01-4	4" NEMA	652	302	350	8,7	11
6LRH 25/02-4		789	369	420	12	15
6LRH 25/03-4		904	436	468	15,3	20
6LRH 25/04-4		1041	503	538	18,6	24
6LRH 25/05	6" NEMA	1271	570	701	55	28
6LRH 25/06		1338	637	701	55	32
6LRH 25/07		1455	704	751	60	36
6LRH 25/08		1522	771	751	60	40
6LRH 25/09		1649	838	811	65	44
6LRH 25/10		1746	905	841	70	49
6LRH 25/11		1813	972	841	70	53
6LRH 25/12		1970	1039	931	75	57
6LRH 25/13		2037	1106	931	75	61
6LRH 25/14		2164	1173	991	83	65
6LRH 25/15		2231	1240	991	83	69
6LRH 25/16		2298	1307	991	83	74

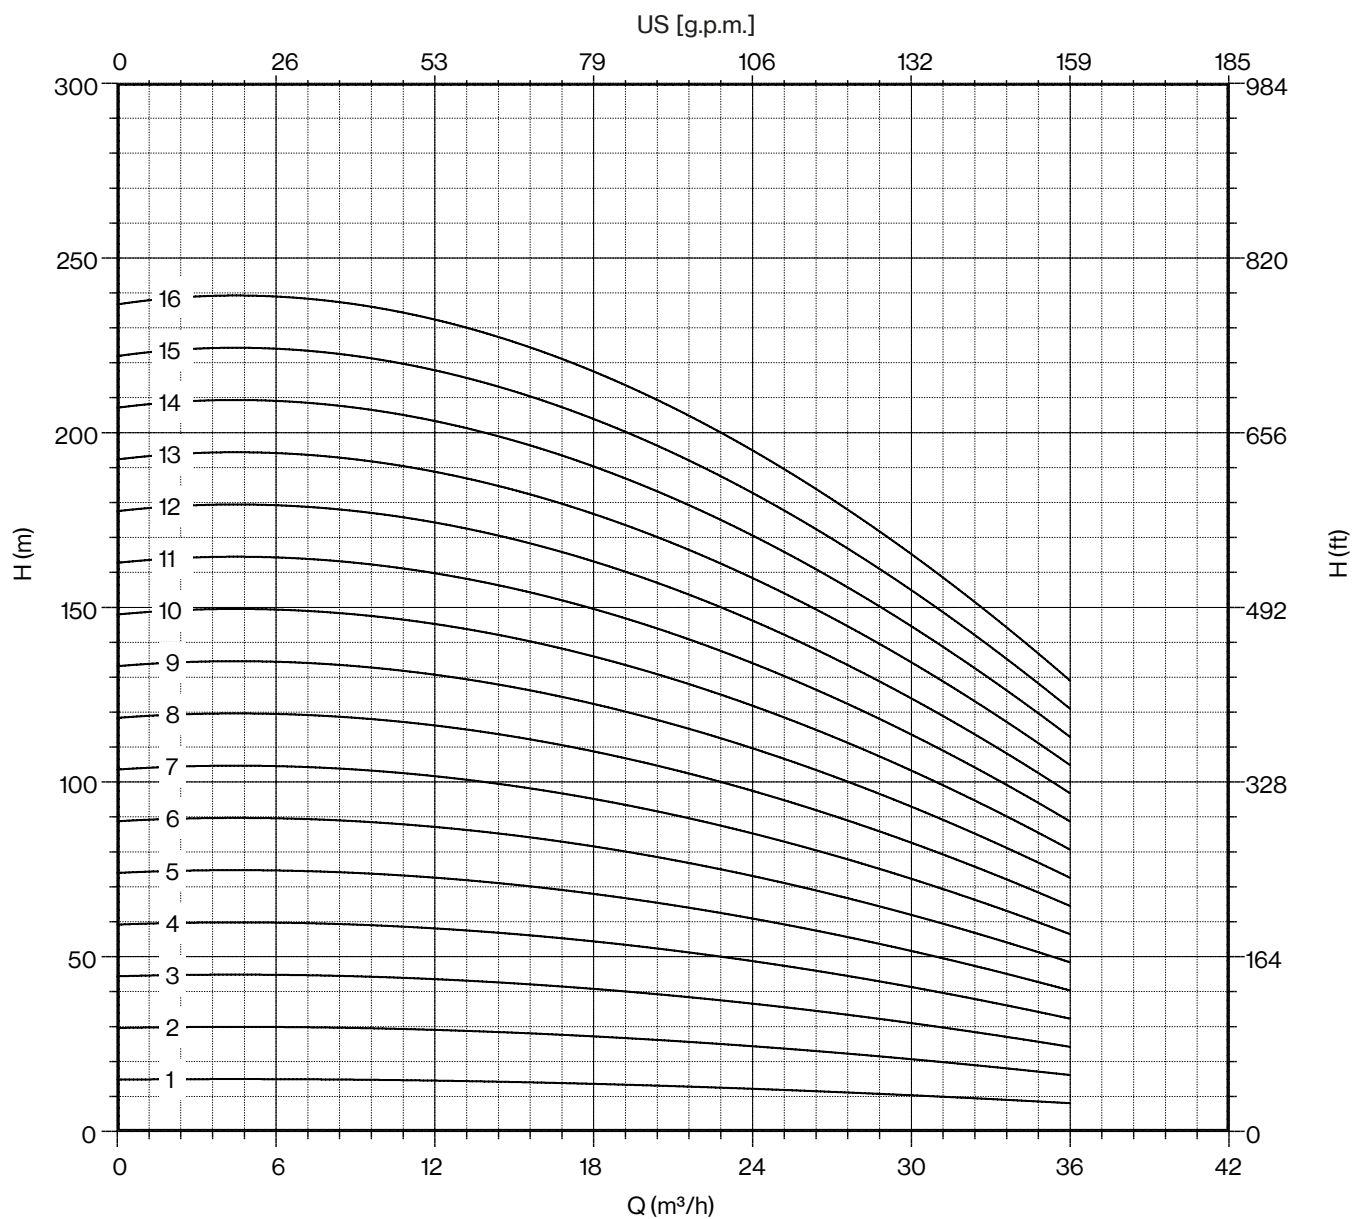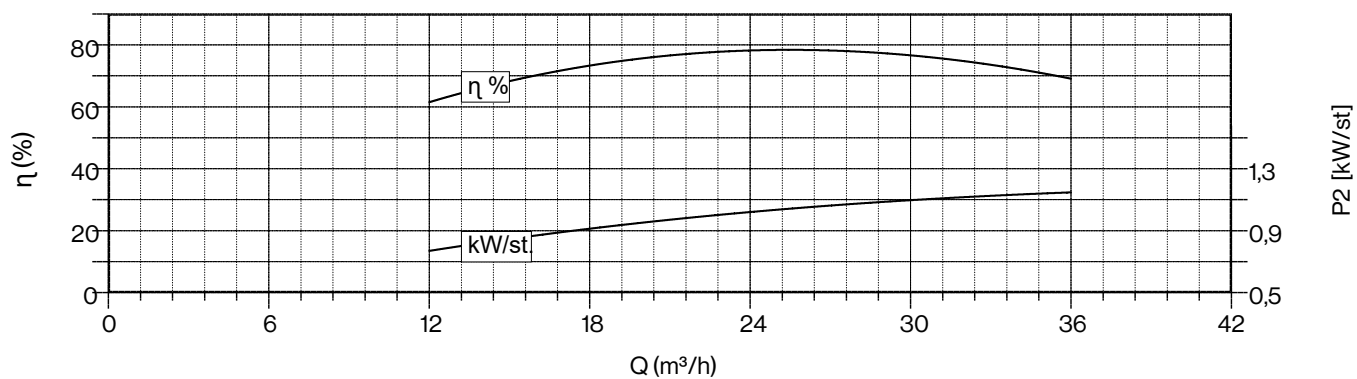



50 Hz - 2900 rpm				Q										
TYPE	SUITABLE MOTOR 3~ 400V		I/min	0	200	250	300	350	400	450	500	550	600	
	P2		CURRENT	I/sec	0,0	3,3	4,2	5,0	5,8	6,7	7,5	8,3	9,2	10,0
	HP	kW	A	m³/h	0	12	15	18	21	24	27	30	33	36
6LRH 25/17	30	22	45,1	H (m)	252	247	240	231	221	207	192	175	156	138
6LRH 25/18	30	22	45,1		266	261	254	245	234	220	203	185	166	146
6LRH 25/19	30	22	45,1		281	276	268	258	247	232	215	196	175	154
6LRH 25/20	35	26	52,9		296	290	282	272	260	244	226	206	184	162
6LRH 25/21	35	26	52,9		311	305	296	286	273	256	237	216	193	170
6LRH 25/22	35	26	52,9		326	319	310	299	286	268	249	227	202	178
6LRH 25/23	35	26	52,9		340	334	324	313	299	281	260	237	212	186
6LRH 25/24	40	30	61,1		355	348	338	326	312	293	271	247	221	194
6LRH 25/25	40	30	61,1		370	363	353	340	325	305	283	258	230	203
6LRH 25/26	40	30	61,1		385	377	367	354	338	317	294	268	239	211
6LRH 25/27	50	37	75,8		400	392	381	367	351	329	305	278	248	219
6LRH 25/28	50	37	75,8		414	406	395	381	364	342	316	288	258	227
6LRH 25/29	50	37	75,8		429	421	409	394	377	354	328	299	267	235
6LRH 25/30	50	37	75,8		444	435	423	408	390	366	339	309	276	243
6LRH 25/31	50	37	75,8		459	450	437	422	403	378	350	319	285	251
6LRH 25/32	50	37	75,8		474	464	451	435	416	390	362	330	294	259
6LRH 25/33	50	37	75,8		488	479	465	449	429	403	373	340	304	267

Max Eff. %	78,5
Max kW / St.	1,15

NPSH (m)	Q=25%	Q=50%	Q=75%	Q=100%
	3	3	4,5	6,6

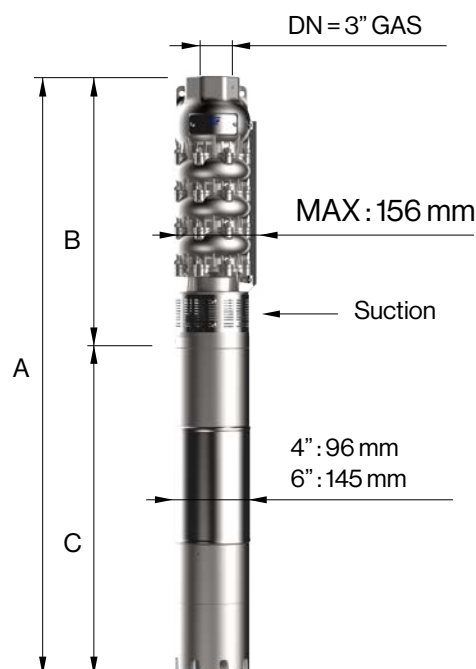


TYPE 3~	MOTOR BRACKET	DIMENSIONS (mm)			WEIGHT (kg)	
		A	B	C	MOTOR	PUMP
6LRH 25/17	6" NEMA	2445	1374	1071	92	78
6LRH 25/18		2512	1441	1071	92	82
6LRH 25/19		2579	1508	1071	92	86
6LRH 25/20		2756	1575	1181	100	90
6LRH 25/21		2823	1642	1181	100	94
6LRH 25/22		2890	1709	1181	100	98
6LRH 25/23		2957	1776	1181	100	103
6LRH 25/24		3094	1843	1251	108	107
6LRH 25/25		3161	1910	1251	108	111
6LRH 25/26		3228	1977	1251	108	115
6LRH 25/27		3385	2044	1341	118	119
6LRH 25/28		3452	2111	1341	118	123
6LRH 25/29		3519	2178	1341	118	127
6LRH 25/30		3586	2245	1341	118	132
6LRH 25/31		3653	2312	1341	118	136
6LRH 25/32		3720	2379	1341	118	140
6LRH 25/33		3787	2446	1341	118	144

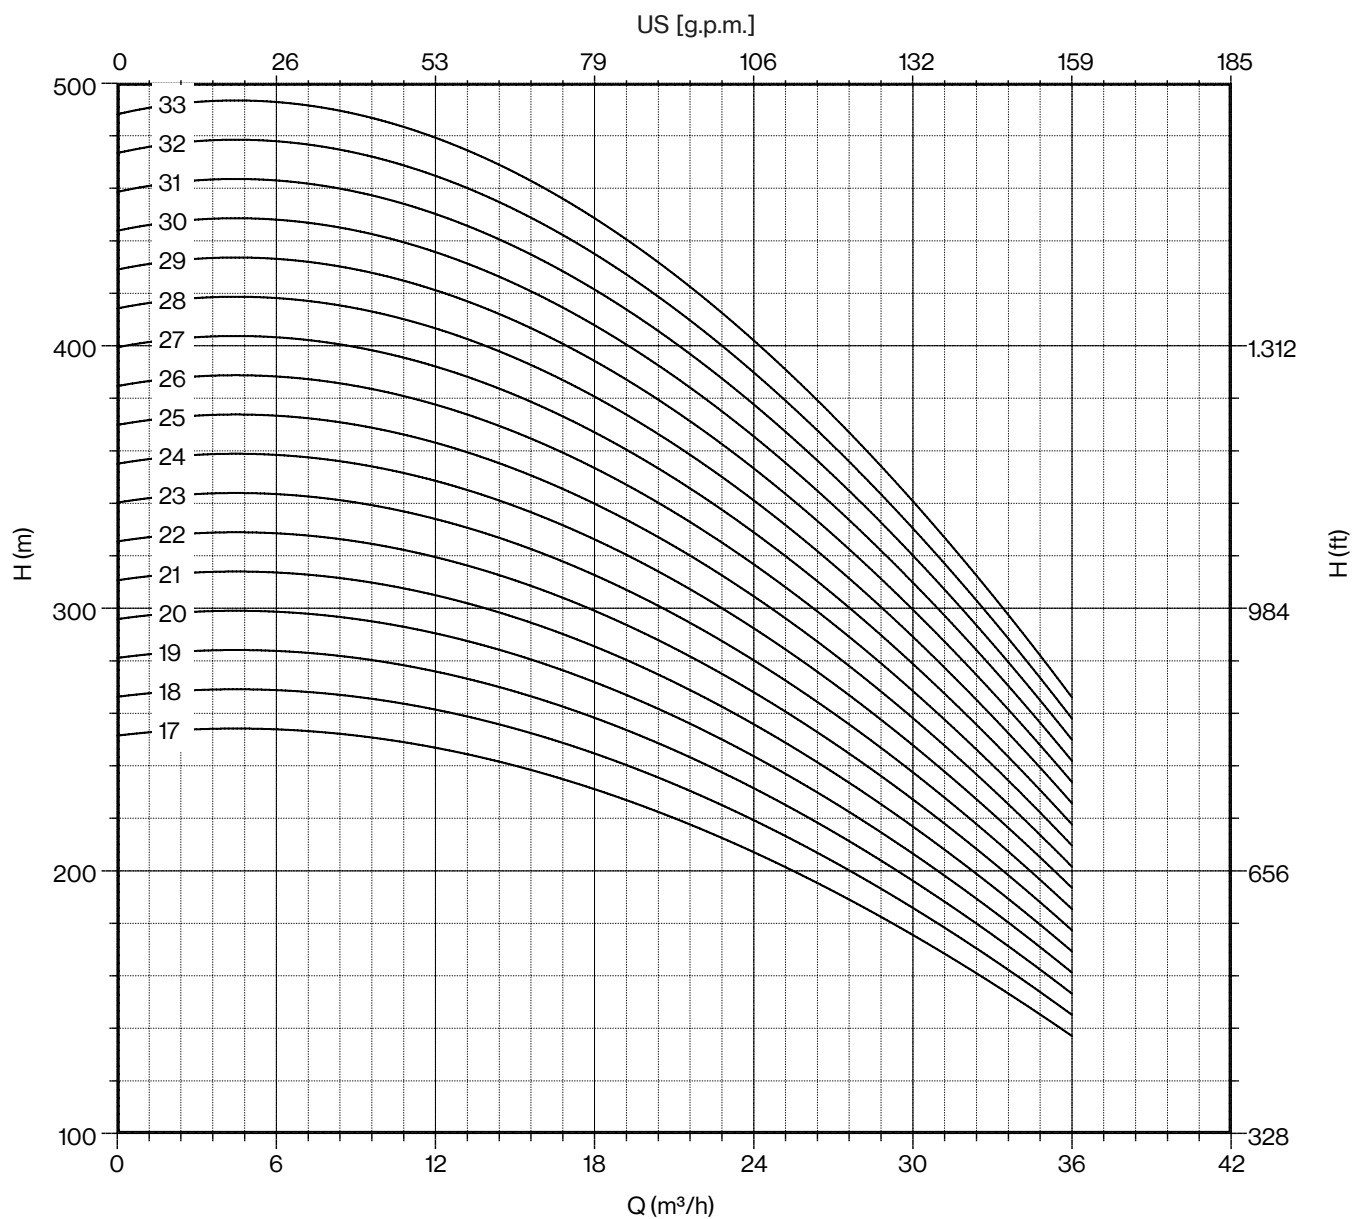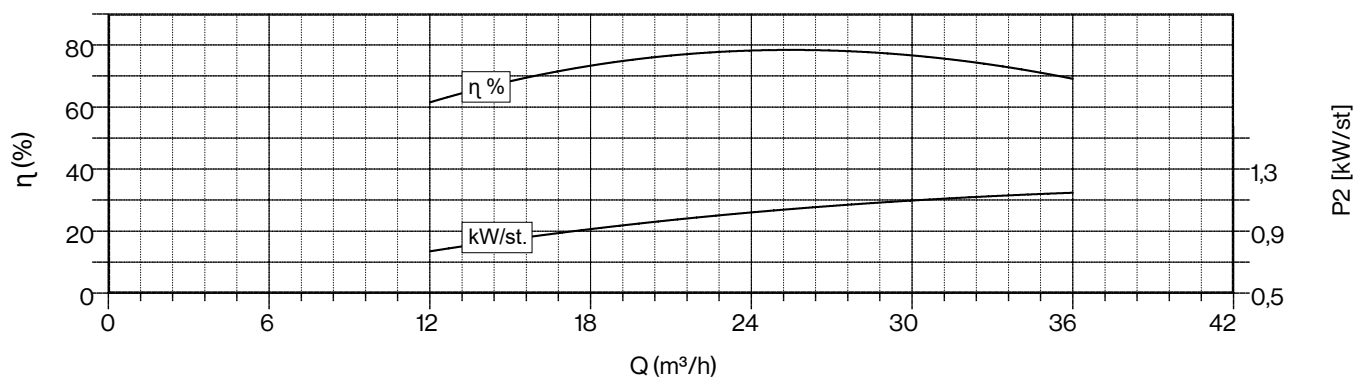



50 Hz - 2900 rpm				Q											
TYPE	SUITABLE MOTOR 3~ 400V			l/min	0	250	300	350	400	450	500	550	600	650	700
	P2		CURRENT	l/sec	0,0	4,2	5,0	5,8	6,7	7,5	8,3	9,2	10,0	10,8	11,7
	HP	kW	A	m³/h	0	15	18	21	24	27	30	33	36	39	42
6LRH 32/01	2	1,5	4,6	H (m)	15	15	15	14	14	13	12	11	10	9	8
6LRH 32/02	4	3	8,3		31	30	29	28	27	26	24	22	20	18	15
6LRH 32/03	5,5	4	9,6		46	45	44	42	41	38	36	33	30	26	23
6LRH 32/04	7,5	5,5	13,6		61	60	59	56	54	51	48	44	40	35	30
6LRH 32/05	10	7,5	16,3		77	76	74	71	68	64	60	56	50	44	38
6LRH 32/06	12,5	9,2	19,9		92	91	88	85	81	77	72	67	60	53	45
6LRH 32/07	12,5	9,2	19,9		107	106	103	99	95	90	84	78	70	62	53
6LRH 32/08	15	11	23,4		122	121	118	113	108	102	96	89	80	70	60
6LRH 32/09	17,5	13	27,3		138	136	132	127	122	115	108	100	90	79	68
6LRH 32/10	20	15	31,5		153	151	147	141	135	128	120	111	100	88	75
6LRH 32/11	20	15	31,5		168	166	162	155	149	141	132	122	110	97	83
6LRH 32/12	25	18,5	38,3		184	181	176	169	162	154	144	133	120	106	90
6LRH 32/13	25	18,5	38,3		199	196	191	183	176	166	156	144	130	114	98
6LRH 32/14	25	18,5	38,3		214	211	206	197	189	179	168	155	140	123	105

Max Eff. %	77,5
Max kW / St.	1,35

NPSH (m)	Q=25%	Q=50%	Q=75%	Q=100%
	3,4	3,4	3,9	7,5

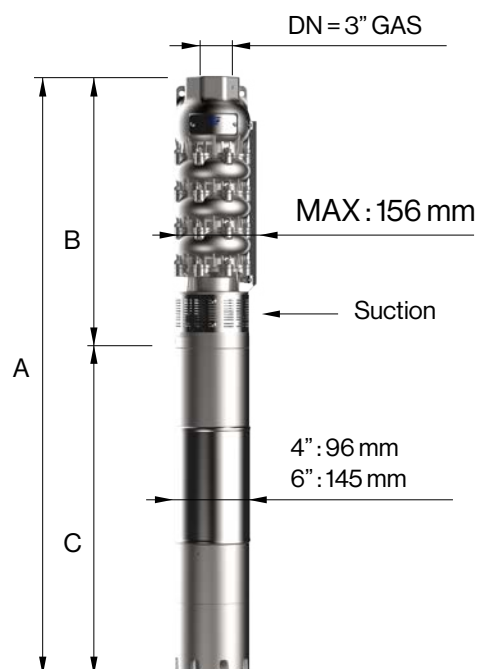


TYPE 3~	MOTOR BRACKET	DIMENSIONS (mm)			WEIGHT (kg)	
		A	B	C	MOTOR	PUMP
6LRH 32/01-4	4" NEMA	687	302	385	10,4	11
6LRH 32/02-4		787	369	418	12,8	15
6LRH 32/03-4		904	436	468	15,3	20
6LRH 32/04-4		1041	503	538	18,6	24
6LRH 32/05	6" NEMA	1271	570	701	55	28
6LRH 32/06		1388	637	751	60	32
6LRH 32/07		1455	704	751	60	36
6LRH 32/08		1582	771	811	65	40
6LRH 32/09		1679	838	841	70	44
6LRH 32/10		1836	905	931	75	49
6LRH 32/11		1903	972	931	75	53
6LRH 32/12		2030	1039	991	83	57
6LRH 32/13		2097	1106	991	83	61
6LRH 32/14		2164	1173	991	83	65

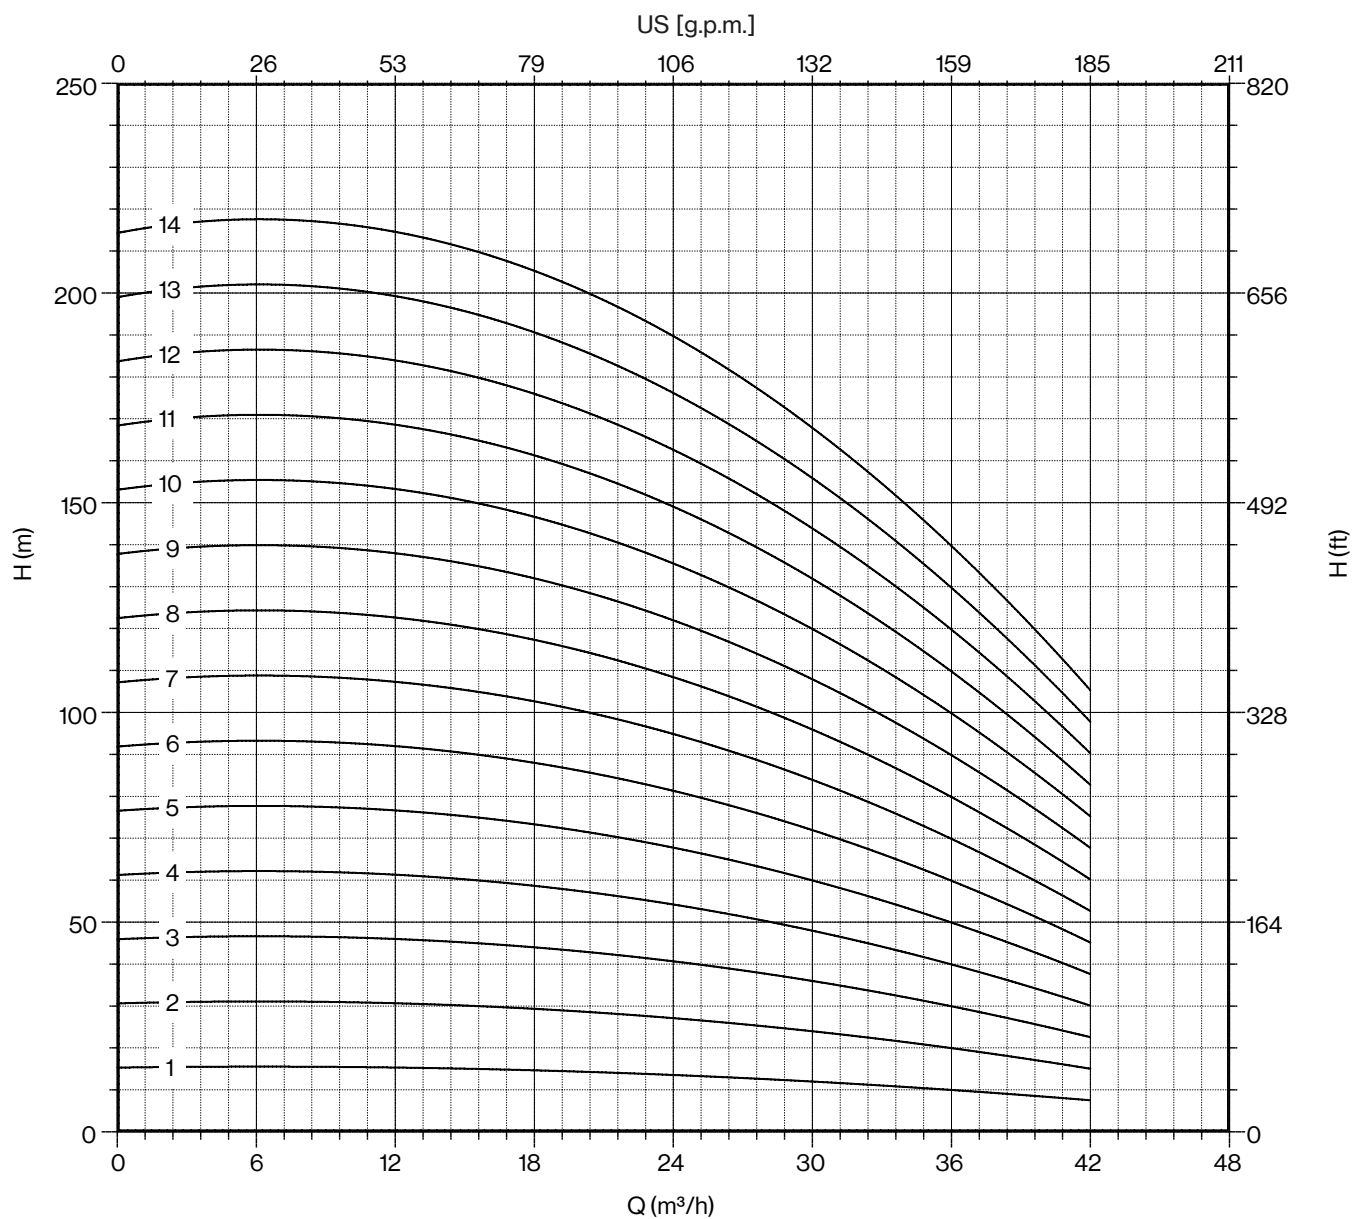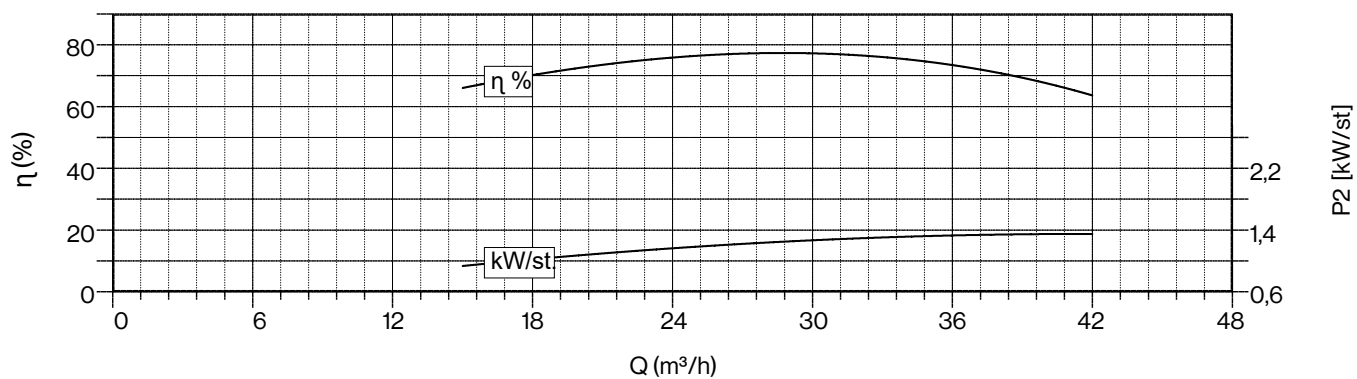

50 Hz - 2900 rpm				Q											
TYPE	SUITABLE MOTOR 3~ 400V		I/min	0	250	300	350	400	450	500	550	600	650	700	
	P2		CURRENT	I/sec	0,0	4,2	5,0	5,8	6,7	7,5	8,3	9,2	10,0	10,8	11,7
	HP	kW	A	m³/h	0	15	18	21	24	27	30	33	36	39	42
6LRH 32/15	30	22	45,1	H (m)	230	227	221	212	203	192	180	167	150	132	113
6LRH 32/16	30	22	45,1		245	242	235	226	216	205	192	178	160	141	120
6LRH 32/17	35	26	52,9		260	257	250	240	230	218	204	189	170	150	128
6LRH 32/18	35	26	52,9		275	272	265	254	243	230	216	200	180	158	135
6LRH 32/19	35	26	52,9		291	287	279	268	257	243	228	211	190	167	143
6LRH 32/20	40	30	61,1		306	302	294	282	270	256	240	222	200	176	150
6LRH 32/21	40	30	61,1		321	317	309	296	284	269	252	233	210	185	158
6LRH 32/22	40	30	61,1		337	332	323	310	297	282	264	244	220	194	165
6LRH 32/23	50	37	75,8		352	347	338	324	311	294	276	255	230	202	173
6LRH 32/24	50	37	75,8		367	362	353	338	324	307	288	266	240	211	180
6LRH 32/25	50	37	75,8		383	378	368	353	338	320	300	278	250	220	188
6LRH 32/26	50	37	75,8		398	393	382	367	351	333	312	289	260	229	195
6LRH 32/27	50	37	75,8		413	408	397	381	365	346	324	300	270	238	203
6LRH 32/28	50	37	75,8		428	423	412	395	378	358	336	311	280	246	210

Max Eff. %	77,5
Max kW / St.	1,35

NPSH (m)	Q=25%	Q=50%	Q=75%	Q=100%
	3,4	3,4	3,9	7,5

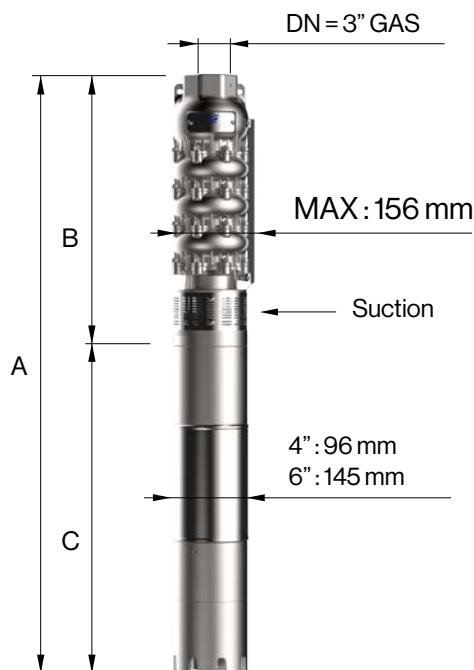

TYPE 3~	MOTOR BRACKET	DIMENSIONS (mm)			WEIGHT (kg)	
		A	B	C	MOTOR	PUMP
6LRH 32/15	6" NEMA	2311	1240	1071	92	69
6LRH 32/16		2378	1307	1071	92	74
6LRH 32/17		2555	1374	1181	100	78
6LRH 32/18		2622	1441	1181	100	82
6LRH 32/19		2689	1508	1181	100	86
6LRH 32/20		2826	1575	1251	108	90
6LRH 32/21		2893	1642	1251	108	94
6LRH 32/22		2960	1709	1251	108	98
6LRH 32/23		3117	1776	1341	118	103
6LRH 32/24		3184	1843	1341	118	107
6LRH 32/25		3251	1910	1341	118	111
6LRH 32/26		3318	1977	1341	118	115
6LRH 32/27		3385	2044	1341	118	119
6LRH 32/28		3452	2111	1341	118	123

* Coupled pump shaft



