



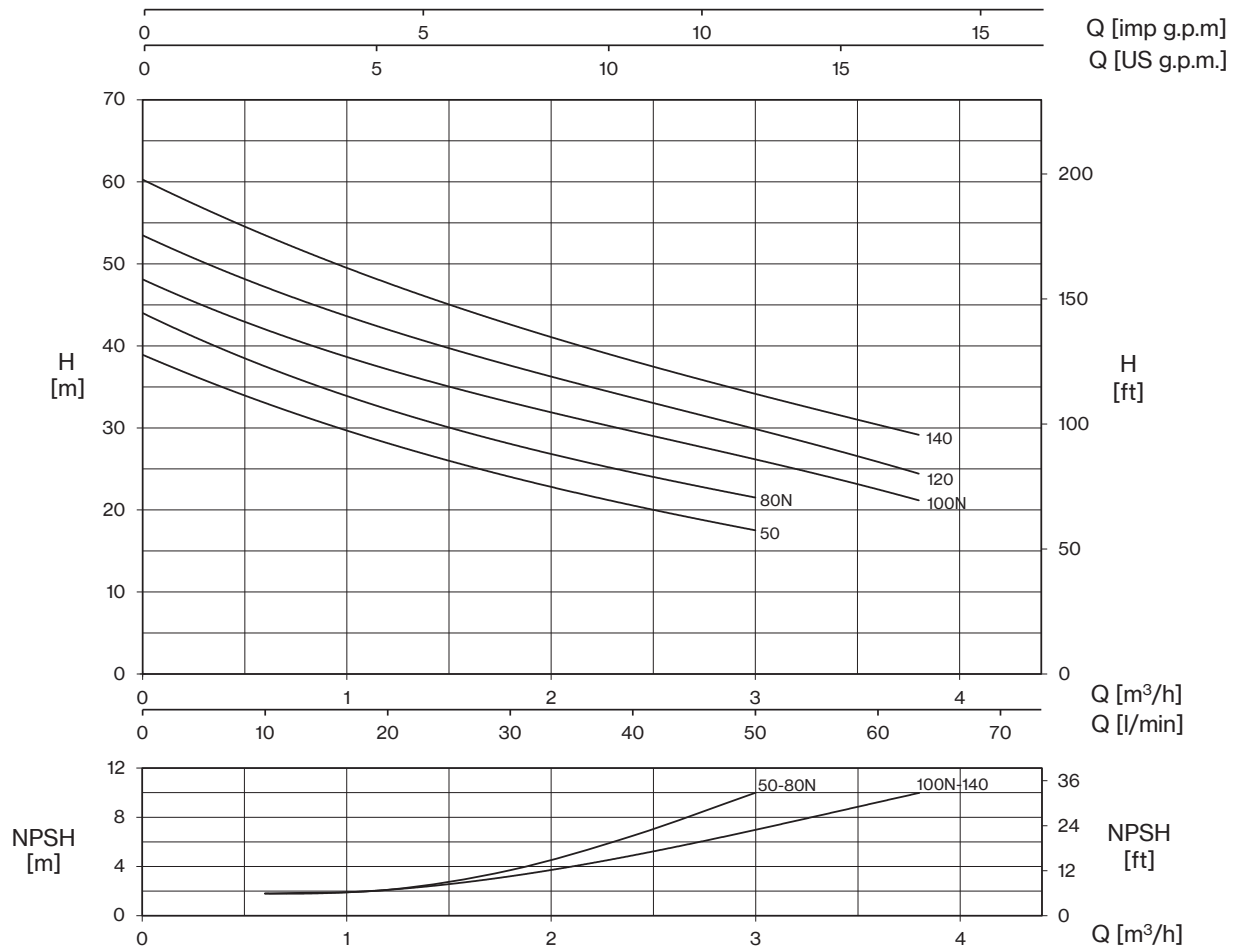

TYPE - 50 Hz		P2		P1		CURRENT		Q (m³/h - l/min)							
1~	3~			1~	3~	1~ 230V	3~ 400V	0	0,6	1,2	1,8	2,4	3	3,6	3,8
								0	10	20	30	40	50	60	63,3
								H (m)							
HP	kW	kW		A											
INOX 50	INOXT 50	0,6	0,44	0,67	0,63	2,9	1,2	38,9	33,1	28,1	24,0	20,6	17,5		
INOX 80N	INOXT 80N	0,8	0,59	0,75	0,76	3,3	1,4	44,0	37,5	32,3	28,0	24,6	21,5		
INOX 100N	INOXT 100N	1	0,74	1,04	0,92	4,7	1,7	48,0	42,3	37,0	33,0	29,6	26,2	22,7	21,0
INOX 120	INOXT 120	1,2	0,88	1,14	1,03	5,2	1,9	53,4	47,4	41,9	37,5	33,7	29,9	26,0	24,3
INOX 140	INOXT 140	1,5	1,1	1,3	1,23	6,0	2,5	60,2	53,6	47,8	42,4	38,0	34,4	30,5	29,0

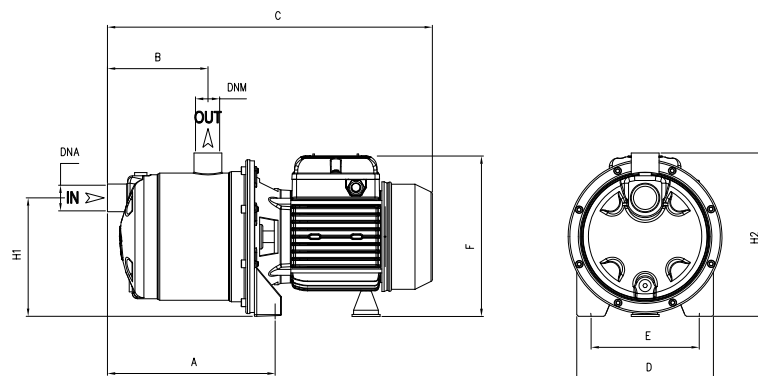

TYPE		DIMENSIONS (mm)													Kg
~1	~3	A	B	C	D	E	F	H1	H2	DNA	DNM	I	L	M	
INOX 50	INOXT 50	208	128	410	175	140	215	153	210	1" G	1" G	430	210	235	8,5
INOX 80N	INOXT 80N	208	128	410	175	140	215	153	210			430	210	235	9,5
INOX 100N	INOXT 100N	208	128	410	175	140	215	153	210			430	210	235	10,5
INOX 120	INOXT 120	208	128	410	175	140	215	153	210			430	210	235	11
INOX 140	INOXT 140	208	128	410	175	140	215	153	210			430	210	235	11,5